



gleeds

Egypt Construction Market Report Q3/Q4 2025

Navigating the reset

Contents

Introduction	03	Construction items prices	22
Dashboard	04	Supplier credits	48
Economic overview	05	GCCE services	49
Construction market overview	11	Contact us	50

Our values



Established presence since 2009

Gleeds has been operating in Egypt since the early 1990s and established a permanent office in Cairo in 2009. We successfully combine British professional standards and quality assurance with local knowledge and experience. Our staff members are qualified to Royal Institution of Chartered Surveyors (RICS), the Chartered Institute of Building (CIOB) and are Project Management Professionals (PMP®).

Since then, Gleeds has expanded rapidly, offering Project Management (PM) services with specialised RICS Chartered Quantity Surveying and world class Cost Management (CM) services across a range of projects covering all sectors of the industry. Gleeds is a reliable and trusted partner to many of the region's most prestigious national and international organisations and has a proud record of accurate cost advice and professional contract and project management on many projects across Egypt and the wider region. Our office comprises over 90 staff, delivering world-class professional services supported by a full-time Data and Research team dedicated to reporting on the Egyptian construction market and economic indicators.

We at Gleeds enjoy a solid track record of project delivery ranging from mega to micro scale schemes and services. We boast an ever-growing client list of major national and international clientele, including Emaar, Majid Al Futtaim Properties, Al Futtaim Group, Microsoft, ExxonMobil, Orange, Huawei, Oracle, OBS, Mobinil, Shell, Bloomberg, and BG.

We have proudly been part of several high-profile projects such as Marassi, Up Town Cairo, City Centre Almaza, Cairo Festival City and others. The relationships we have built throughout these projects and with our clients has grown over the years, resulting in numerous repeat business opportunities and extended collaborations.

Our belief in providing our clients with state-of-the-art, unbiased, and fully integrated project management is at the core of our business; it is the corner stone of our ethos and approach. We feel a responsibility to share our knowledge and experience with the construction market to help grow and enrich the industry that we are proud to be part of. We hope that you find this report to be insightful and we welcome the opportunity to discuss the content and any additional, specifically tailored reports with you.



Muir Smith
Director, Gleeds



Dashboard

Figure 1

Parameter	% Change Q3 (Q3-Q2)	% Change Q4 (Q4-Q3)
USD	▼ -3.45%	▼ -2.38%
Euro	▼ -0.47%	▼ -2.76%
GBP	▼ -2.55%	▼ -3.69%
Stock market	▼ 9.85%	▲ 14.13%
CPI	▲ 0.87%	▲ 3.48%
Inflation rate	▼ -17.54%	▼ -0.80%
Foreign reserves (USD bn)	▼ 1.67%	▼ 2.71%
Interest rate	▼ -6.85%	▼ -8.82%
Fuel prices (Gasoline 92)	▼ 3.86%	▼ 7.44%
Diesel prices	▼ 4.30%	▼ 8.25%

Key indicating change

- ▲ High positive impact
- ▼ Slight positive impact
- Constant
- ▲ Slight negative impact
- ▼ High negative impact

Quarterly values are average values of parameters over each quarter.

Data obtained from:

<http://www.tradingeconomics.com> 

<http://www.cbe.org.eg> 

<http://www.egx.com.eg> 

<http://www.investing.com> 



Marna Marassi Resort




Economic overview

Economic overview

Foreign exchange rates

Figure 2


EGP to USD — Central Bank of Egypt

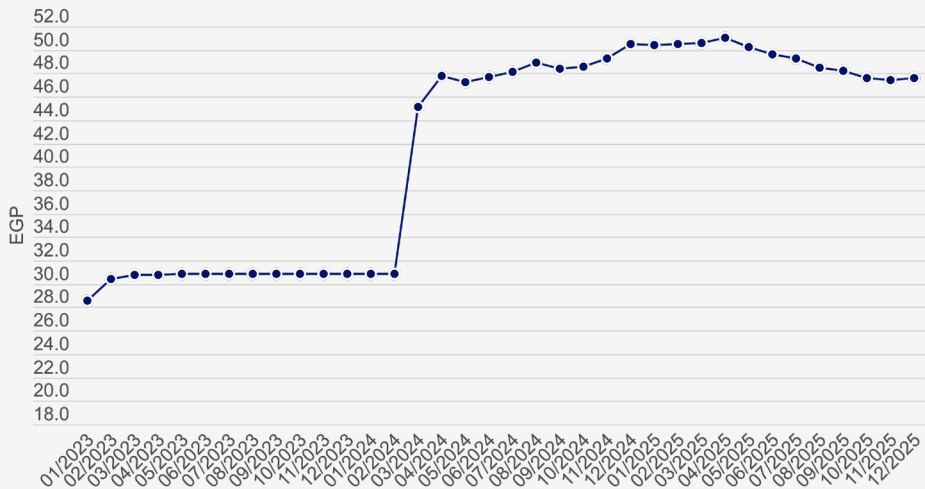

During Q3 & Q4 2025, the average value of USD against EGP has slightly decreased recording an average of EGP 48.08 compared to last quarter. It is expected that the USD exchange rate will remain within this range against the EGP in the next quarter.

Figure 3

EGP to EUR — Central Bank of Egypt

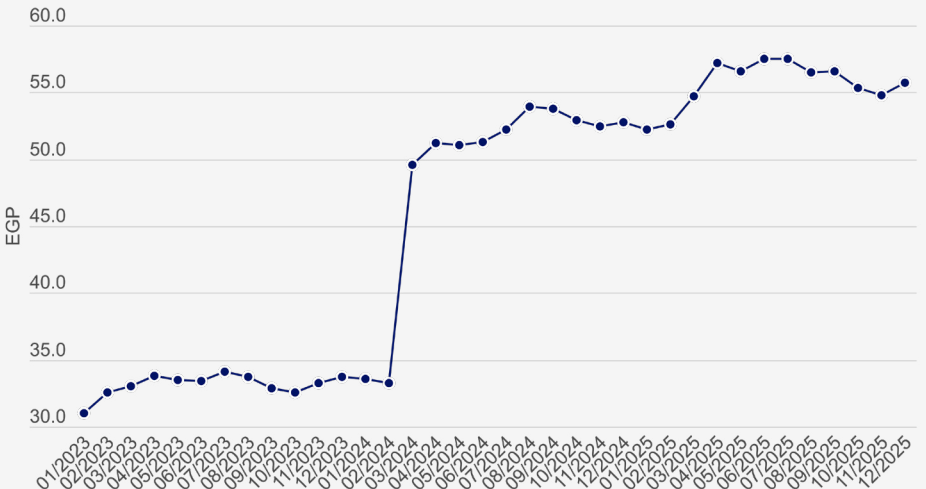

During Q3 & Q4 2025, Euro exchange increased against the Egyptian pound recording an average of EGP 56.6 compared to last quarter. It is expected that the value of Euro exchange rate will remain within this range against the EGP in the next quarter.




Economic overview

Foreign exchange rates (continued)

Figure 4

EGP to GBP — Central Bank of Egypt

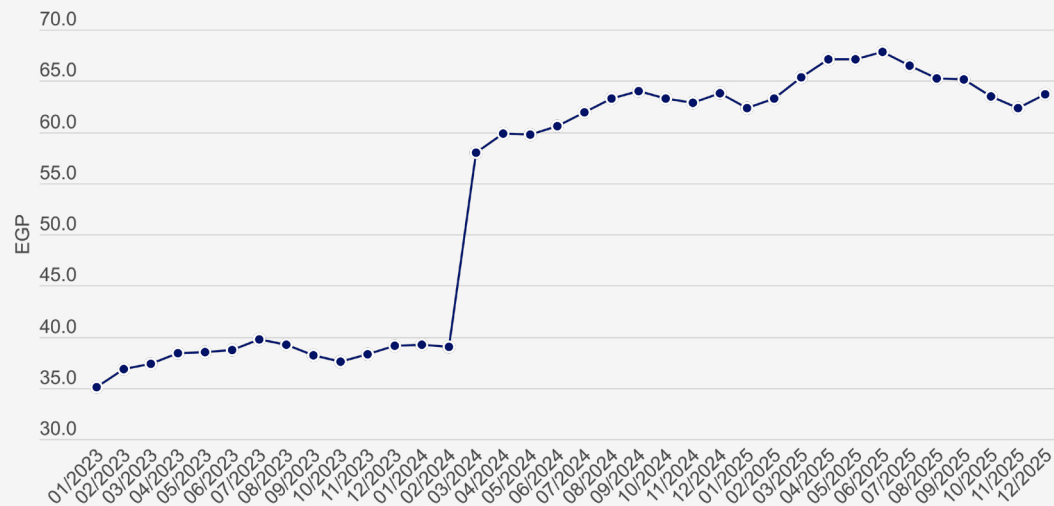

During Q3 & Q4 2025, GBP exchange rate increased against the Egyptian pound recording an average of EGP 63.39 compared to las quarter. It is expected that the value of GBP exchange rate will remain within this range against the EGP in the next quarter.






Marassi Resort

Economic overview

Egyptian stock market

Figure 5

EGX 30 — The Egyptian Exchange

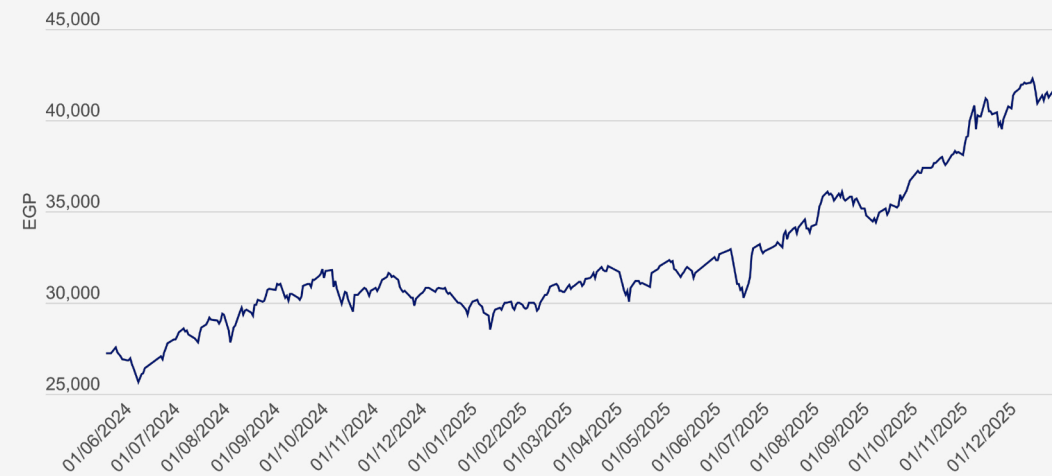

The EGX 30, the Egyptian stock market indicator, measures the performance of the top 30 traded companies on the Egyptian stock exchange. During Q3 & Q4 2025, the EGX30 indicator witnessed an increase recording an average of 41,828.97 points compared to last quarter.


Obtained from <http://www.investing.com>

Economic overview

Central bank interest rates

Figure 6

Interest rate — Trading Economics

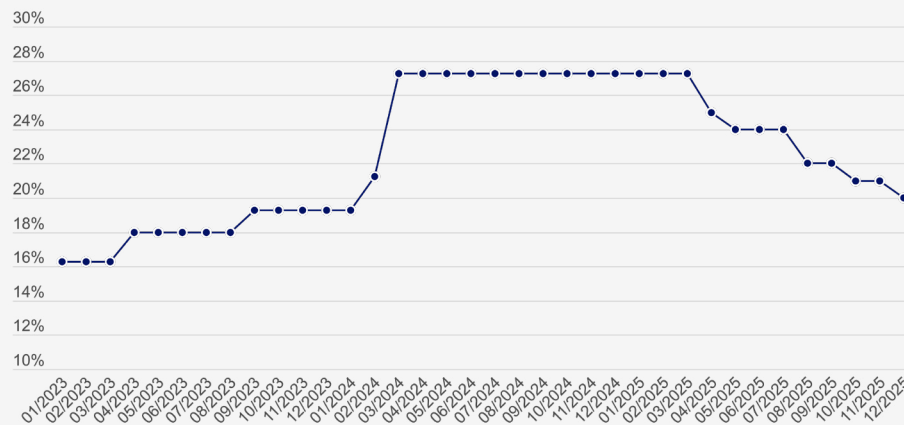


Decisions regarding interest rate values are made by the Central Bank of Egypt (CBE). The official interest rate is the overnight deposit rate. During Q3 & Q4 2025, the interest rate decreased. It is also expected to decrease again during the next quarter.

Consumer price index


Figure 7

CPI — Trading Economics

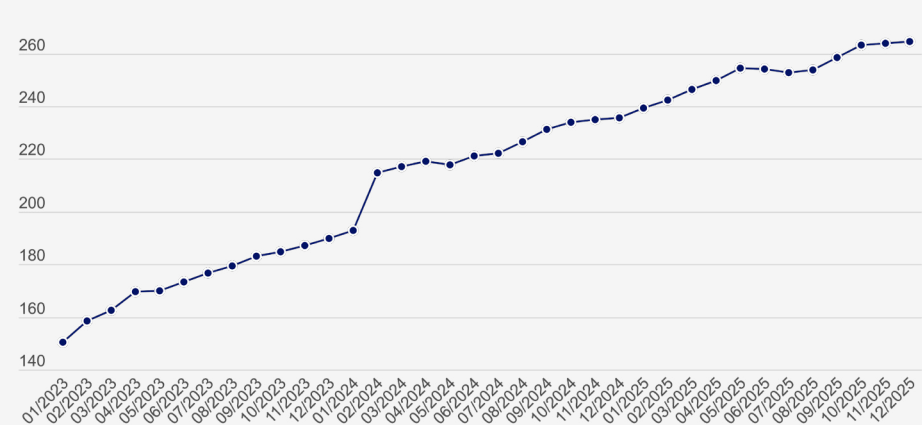

The Consumer Price Index (CPI) measures increase in prices paid by consumers for everyday goods and services. During Q3 & Q4 2025, CPI increased to index to an average 259 points compared to 243 index points in the previous quarter. It is expected to increase during the next quarter.


From <http://www.tradingeconomics.com>

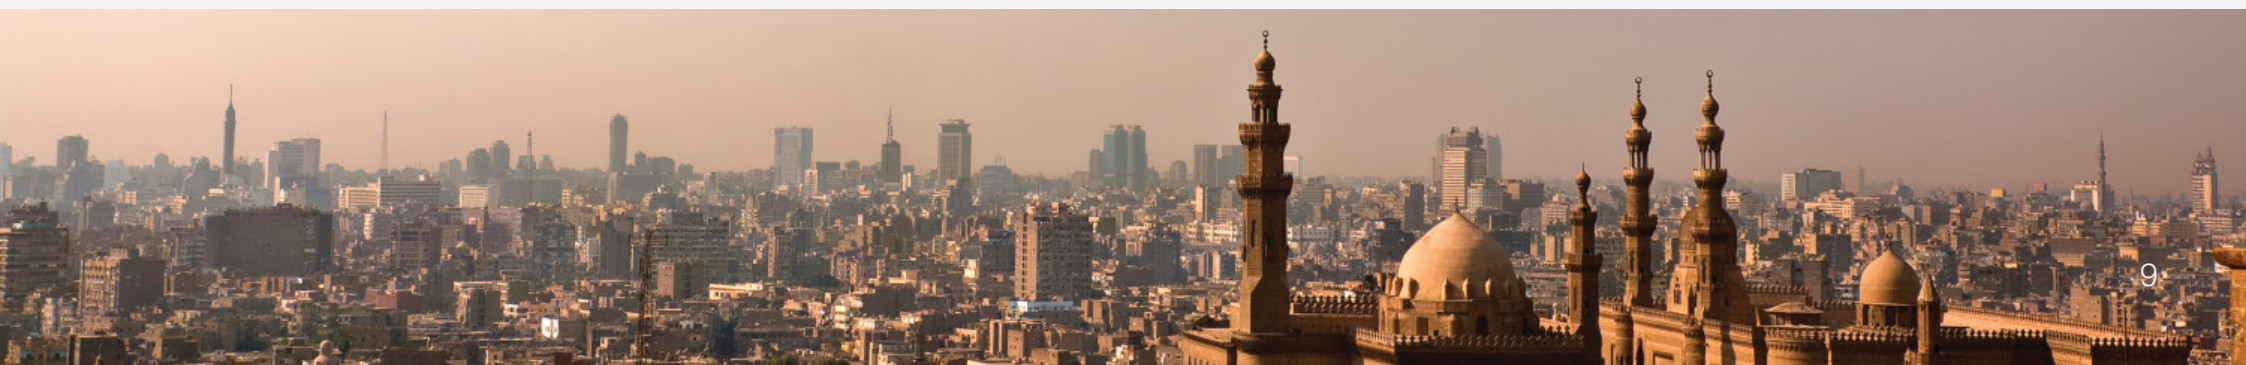

Economic overview

Foreign currency reserves

Figure 8

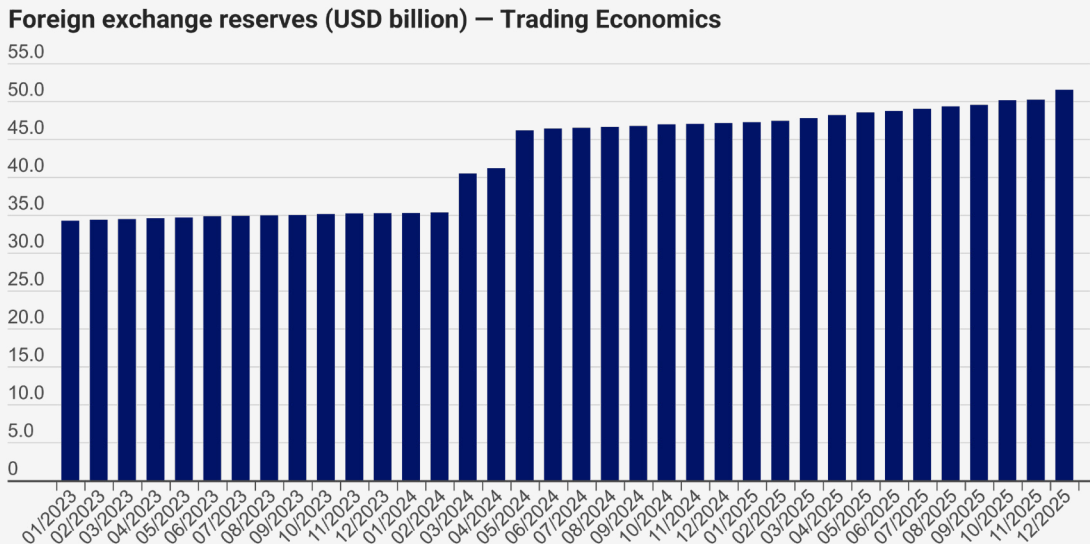

Foreign Exchange Reserves in Egypt are reported by the CBE, these are the foreign assets held or controlled by the CBE. The reserves are generally used to finance the balance of payments and to control exchange rates. During Q3 & Q4 2025, Egypt foreign exchange reserves increased recording an average USD 51 billion. It is expected for the Foreign Exchange Reserves to gradually increase in the following quarter.





Navigating the reset:

An economic analysis of the Egyptian construction market in 2026

Construction market overview

Introduction: A market in transition

The Egyptian construction sector in early 2026 finds itself at a critical juncture, characterised by a transition from crisis management to a stabilised, albeit high cost, “new normal.”

After years of volatility driven by currency devaluation and inflationary spikes, the market is currently experiencing a recalibration of pricing mechanisms, regulatory frameworks, and supply chain dynamics. This report aims to provide a detailed analysis of the top economic factors influencing construction costs and tender pricing in Egypt today.

It explores the shift in the Value Added Tax (VAT) regime, which has altered the cash flow profile of contracting organisations. It further examines the dichotomy between the volatile “green metals” like copper and aluminum, which are surging due to global demand, and the relative domestic stability of steel reinforcement.

Furthermore, the analysis delves into the inflationary pressures of energy deregulation, the lingering “risk premiums” on imported goods, and the resurgence of Foreign Direct Investment (FDI) as a double-edged sword that fuels growth while exacerbating labour shortages.



Damac Park Avenue, Phase 1,2, Cairo

Construction market overview

The VAT amendment: From cost accumulation to fiscal neutrality

One of the most significant regulatory shifts affecting the construction sector in the past year has been the amendment to the VAT law, specifically the transition from the 5% schedule tax to the standard 14% VAT rate. Historically, construction services in Egypt were subject to a 5% schedule tax, a non-recoverable cost that contractors had to absorb or price into their tenders as a direct expense. This old regime created a “tax on tax” cascading effect, where contractors paid 14% VAT on their material inputs (cement, steel, cables) but could not offset these payments against the 5% tax collected from the client. This resulted in hidden costs and inflated tender prices as contractors sought to recover their unclaimable input tax losses.

The recent legislative amendment (Law No. 157 of 2025) aims to sort this structural imbalance by abolishing the 5% schedule tax for general construction activities and subjecting them to the standard 14% rate. While the headline rate has increased, the move is economically beneficial for the sector's maturity. Contractors can now fully deduct the input VAT paid on materials and services against the output VAT collected from employers. This alignment with global best practices effectively turns VAT into a pass-through tax rather than a stick cost, theoretically reducing the net cost base of construction projects.

However, this transition has not been a smooth one. For a limited period following the enactment, the market faced confusion regarding transitional contracts, those signed under the 5% regime but executed under the 14% regime. This uncertainty led to disputes over contract sums and variations. Today, while the regulatory issues have been defined and resolved and the mechanism is clear, a new challenge has emerged: cash flow pressure. Contractors must now finance a 14% tax payment on their supply chain purchases often months before they receive the corresponding 14% payment from the client. Consequently, while the cost impact is neutral, the working capital requirement for contractors has increased, necessitating stricter adherence to electronic invoicing and more agile payment certification cycles by cost consultants to prevent supply chain bottlenecks.





Marassi Resort

Construction market overview

The copper “supercycle” and aluminum inflation

While domestic regulations have stabilised, international commodity markets are introducing new volatility, most notably in the price of copper. As of early 2026, we are witnessing what analysts call a “copper supercycle,” driven not by construction demand alone but by a structural global deficit. The rapid expansion of green energy infrastructure—solar farms, wind turbines, and electric vehicle (EV) charging networks—combined with the growth of data centers powering Artificial Intelligence (AI), has created an insatiable demand for conductive metals. Copper prices have tested the \$10,000–\$11,000 per tonne range on the London Metal Exchange (LME), and this trend is directly importing inflation into Egyptian Mechanical, Electrical, and Plumbing (MEP) packages.

For Egyptian construction projects, the impact is acute. Electrical packages, which typically account for 20–30% of a building’s cost, are seeing price revisions on a near-monthly basis. Items such as high-voltage cabling, busbars, transformers, and switchgear are experiencing price hikes that far outpace general inflation. Cost consultants must now account for the fact that a cable price valid at the time of tender may be obsolete by the time of procurement. This has necessitated the re-introduction of fluctuation clauses for copper-based items in standard contracts, shifting the risk from the contractor back to the employer to avoid excessive risk pricing.

Parallel to copper, aluminum prices are also on an upward trajectory, nearing three-year highs. Aluminum is energy-intensive to produce, and global supply constraints, particularly from key smelters in China and Europe facing high energy costs, have tightened the market. In the context of the Egyptian market, this directly affects the cost of architectural facades and curtain walling. The “delivered to site” cost of aluminum profiles has risen, forcing facade contractors to reduce the validity period of their quotations. This correlation between energy costs and metal prices means that high-spec office developments and residential towers with extensive glazing are seeing their facade packages come in over budget, requiring value engineering exercises or earlier procurement strategies to lock in rates.

Construction market overview

Steel stability vs. cement inflation

In contrast to the volatility of imported metals, the local steel rebar market has demonstrated a period of relative stability over the past 12 months. Current rebar prices have settled into a predictable band, fluctuating between EGP 30,700 and EGP 34,200 per tonne. This stability is largely attributed to a balanced supply-demand dynamic within Egypt. Domestic production capacity has improved, and the stabilisation of the Egyptian Pound against the US Dollar has allowed integrated steel mills to better manage the cost of imported billets and scrap metal. This stability provides a solid baseline for structural cost estimating, allowing for more certainty in the early stages of project budgeting compared to the uncertainty witnessed in 2023-2024.

However, the cement market tells a different story. Cement prices have seen a creeping but persistent increase, rising significantly throughout 2025 and sustaining high levels into 2026. Prices for Ordinary Portland Cement (OPC) have surged by over 80% compared to previous years, now often trading above EGP 3,600 per tonne. Unlike steel, which is heavily influenced by global scrap prices, cement pricing is intensely local and sensitive to energy input costs. The cement industry is energy-intensive, relying heavily on coal, natural gas, and mazut.

The increase in cement prices is not driven by a shortage of raw material—Egypt has abundant limestone—but by the rising cost of production and logistics. The government's gradual lifting of energy subsidies (discussed in the next section) has increased the operating costs for cement kilns. Additionally, the consolidation of the market, following the acquisition of smaller players and the exit of others, has given the remaining major producers greater pricing power. This divergence between stable steel and rising cement costs creates a mixed picture for structural concrete packages, where the savings on reinforcement are effectively cancelled out by the inflation in concrete supply rates.





Damac Park Avenue Phase 1,2 Cairo

Construction market overview

Energy subsidy reform and fuel price escalation

A critical driver of underlying inflation in the construction sector is the Egyptian government's strategic decision to phase out fuel subsidies completely. This long-term plan, agreed upon with the International Monetary Fund (IMF), aims to bring domestic fuel prices to international cost-recovery levels by the end of 2025 or early 2026. The journey to this point has been marked by a series of aggressive price hikes that have rippled through the entire construction supply chain.

Significant increases occurred throughout 2024, with major hikes in March, July, and October, followed by further adjustments in April 2025. These were not incremental adjustments but substantial leaps; for instance, diesel prices—the lifeblood of the construction industry—saw increases exceeding 60% over a single year. Diesel powers the heavy machinery on site (excavators, cranes, generators) and, crucially, the fleets of trucks that transport raw materials.

The effect on construction activities has been twofold. First, the direct cost of “Preliminaries” has risen. Contractors are paying significantly more to run their sites, power their generators in off-grid locations, and operate their plant. Second, and more impactful, is the increase in logistics costs. Low-value, high-volume materials like sand, aggregate, and hollow blocks are particularly sensitive to transport costs. When fuel prices rise, the “delivered” rate of sand can increase by 15-20% overnight, purely due to the haulage component. This effectively raises the floor price for all basic construction activities, from earthworks to masonry, embedding a permanent layer of inflation into the market that is unlikely to recede.

Construction market overview

Imported risk premiums and the “fear tax”

Despite the relative stabilisation of the currency exchange rate in recent months, the impact of past devaluation cycles remain visible in the pricing of imported finished goods. Suppliers and distributors of high-end imported materials—such as Italian marble, Spanish porcelain, German sanitary ware, and advanced BMS systems—continue to apply a “risk premium” to their quotations.

Even though the Central Bank of Egypt has improved foreign currency liquidity, importers remain wary of sudden regulatory changes or liquidity crunches that could delay their ability to pay foreign suppliers. To mitigate this perceived risk, they price their goods using an internal exchange rate that is often higher than the official bank rate, acting as a buffer against potential volatility. Furthermore, the disruption in Red Sea shipping routes due to regional geopolitical tensions has added a layer of insurance and freight cost volatility.

Consequently, tender returns for high-end finishing packages often appear disproportionately high compared to the actual exchange rate. Cost managers are finding that “Prime Cost” (PC) sums for imported items are being exhausted rapidly. There is a growing trend among clients to accept “local alternatives” of international brands—materials manufactured in Egypt under license—to bypass this risk premium. However, for projects demanding exclusive imported specifications, the budget must carry a significant contingency allowance to cover these defensive pricing strategies adopted by suppliers.



Marassi Resort

Construction market overview

FDI resurgence: The Ras El Hekma effect

On the macroeconomic front, the construction sector is benefiting from a massive injection of liquidity via Foreign Direct Investment (FDI). The landmark deal for the development of Ras El Hekma on the North Coast, signed with the UAE, along with subsequent agreements with Saudi and European investors, has fundamentally altered the investment landscape. Egypt ranked first in Africa for FDI inflows in 2024/2025, signaling a restoration of confidence in the Egyptian economy's long-term potential.

This influx of capital has reactivated a pipeline of stalled projects and launched a new generation of mega-developments. The Ras El Hekma deal alone, valued at \$35 billion in upfront investment, has not only stabilised the central bank's reserves but has also trickled down into the construction supply chain. We are witnessing a surge in demand for Grade-A contractors and consultancies to service these massive master-planned communities.

However, this FDI boom brings its own set of challenges for cost management. The sheer scale of these projects demands enormous resources, effectively "crowding out" smaller private developers. When a mega-project creates a vacuum for concrete, steel, and labour in a specific region, it drives up prices for everyone else. The focus of foreign investors on "fast-track" delivery programs is also pushing up the cost of acceleration, as contractors know they can command a premium for speed and guaranteed delivery in a liquidity-rich environment.



Construction market overview

The silent crisis: Skilled labour shortage

Finally, perhaps the most understated yet critical threat to cost certainty in 2026 is the acute shortage of skilled labour. While Egypt has a vast population, the pool of qualified construction labour—certified welders, experienced MEP technicians, and high-quality finishers—is shrinking relative to demand. This is largely driven by the aggressive recruitment drives from Saudi Arabia.

The Kingdom's Vision 2030 giga-projects, such as NEOM, The Line, and the Red Sea Project, are absorbing Egyptian talent at an unprecedented rate. Egyptian engineers and foremen have long worked in the Gulf, but the current wave of migration includes skilled tradespeople who are offered wages significantly higher than what the local market can sustain. This “brain drain” has left local contractors struggling to staff their projects with competent teams.

The economic impact is a sharp rise in labour rates for specialised trades. Contractors are forced to pay higher wages to retain their best crews, and productivity often suffers as they resort to less experienced replacements. For the cost manager, this manifests as lower productivity rates in the build-up of unit rates and a higher risk of defects and rework, which indirectly increases the final account. The labour component of the unit rate, historically low in Egypt, is becoming a more significant driver of cost, pushing the industry towards mechanisation and pre-fabrication where possible to reduce reliance on manpower.





Cairo Festival City, Business Park A & B

Construction market overview

Cost of finance as a structural cost driver

In 2026, the cost of finance has evolved from a secondary commercial consideration into a structural component of construction pricing. Elevated interest rates, extended certification and payment cycles, and the upfront financing of materials and VAT have significantly increased contractors' working capital requirements. As a result, financing costs are no longer absorbed within overheads but are increasingly priced directly into unit rates and preliminaries. This phenomenon partially explains why tender prices remain elevated despite relative stabilisation in material costs, as time, liquidity, and cash flow risk have become monetised inputs in the construction cost equation.

North coast developments, supply constraints, and benchmark distortion

The rapid launch of multiple mega-developments along the North Coast has introduced a distinct regional cost dynamic that diverges from traditional national benchmarks. Concentrated demand for concrete, aggregates, transportation fleets, and skilled labour has strained locally available supply, while reliance on distant production hubs has increased logistics and mobilisation costs. In addition, project locations outside established urban centers introduce seasonal access limitations and higher site running costs, creating a clear premium location. Consequently, tender rates in the North Coast are trending materially above Cairo-based benchmarks, posing a risk of benchmark distortion unless explicit regional adjustment factors are incorporated into cost planning and comparative analysis.

Construction materials inflation forecast

Figure 9


Construction materials inflation (indices from January 2008 to December 2025)

	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025
January	90%	97%	92%	107%	107%	110%	126%	142%	143%	209%	240%	264%	273%	298%	341%	451%	585%	703%
February	92%	99%	92%	110%	106%	118%	127%	141%	143%	206%	240%	264%	273%	301%	345%	488%	646%	707%
March	93%	94%	93%	109%	107%	122%	130%	142%	150%	210%	253%	264%	271%	303%	381%	502%	656%	709%
April	100%	93%	96%	107%	106%	124%	132%	143%	153%	210%	250%	264%	271%	305%	406%	533%	614%	715%
May	101%	92%	100%	108%	106%	124%	133%	144%	156%	210%	249%	264%	271%	318%	404%	543%	642%	724%
June	104%	92%	101%	110%	106%	124%	133%	142%	155%	213%	251%	265%	271%	321%	404%	543%	647%	751%
July	107%	93%	103%	109%	106%	124%	136%	136%	155%	225%	266%	265%	271%	328%	400%	544%	662%	748%
August	109%	92%	103%	110%	106%	124%	139%	142%	158%	228%	265%	265%	273%	329%	400%	533%	675%	751%
September	104%	93%	104%	110%	106%	124%	140%	143%	158%	230%	265%	265%	273%	330%	401%	536%	683%	751%
October	102%	93%	104%	109%	106%	124%	141%	143%	174%	233%	265%	268%	278%	332%	402%	537%	693%	751%
November	99%	92%	104%	107%	106%	125%	140%	145%	190%	235%	265%	268%	278%	338%	415%	552%	699%	759%
December	98%	93%	104%	107%	107%	125%	141%	143%	203%	240%	264%	265%	288%	340%	428%	562%	685%	762%*

* Predicted

Figure 10

Inflation rate

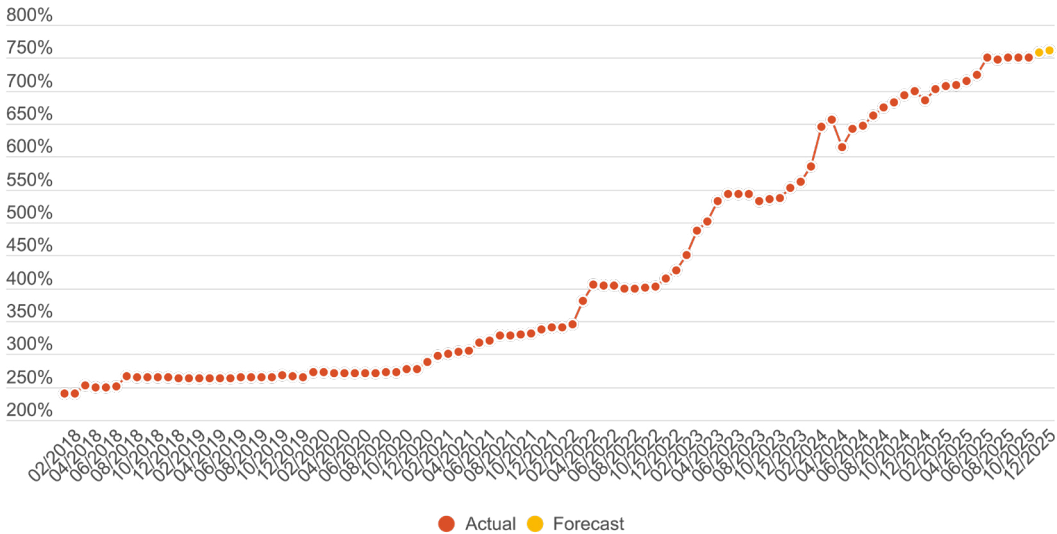

Marassi Resort



Construction items prices

Construction items prices


Summary

Figure 11

Division	% Change Q3 (Q3-Q2)	% Change Q4 (Q4-Q3)
Division 01: General requirements	▲ -2237.6%	▼ 20.3%
Division 02: Site construction	▼ 107.1%	▲ -100.0%
Division 03: Concrete	▼ -1.9%	▲ -98.5%
Division 04: Masonry	▲ -60.0%	▼ 98.9%
Division 05: Metal	○ 0.0%	▲ 0.2%
Division 07: Thermal and moisture insulation	▲ -87.6%	▲ -100.0%
Division 08: Doors and windows	▼ 71.6%	▲ -100.0%
Division 09: Finishes	▼ -6.7%	▼ 26.4%
Division 13: Special construction	○ 0.0%	○ 0.0%
Division 14: Conveying systems	▲ -199.1%	▼ -3.2%
Division 15: Mechanical	▼ 10.8%	▲ -100.0%
Division 16: Electrical	▼ 131.9%	▲ -100.0%

Key indicating change

- ▲ High positive impact
- ▼ Slight positive impact
- Constant
- ▲ Slight negative impact
- ▼ High negative impact

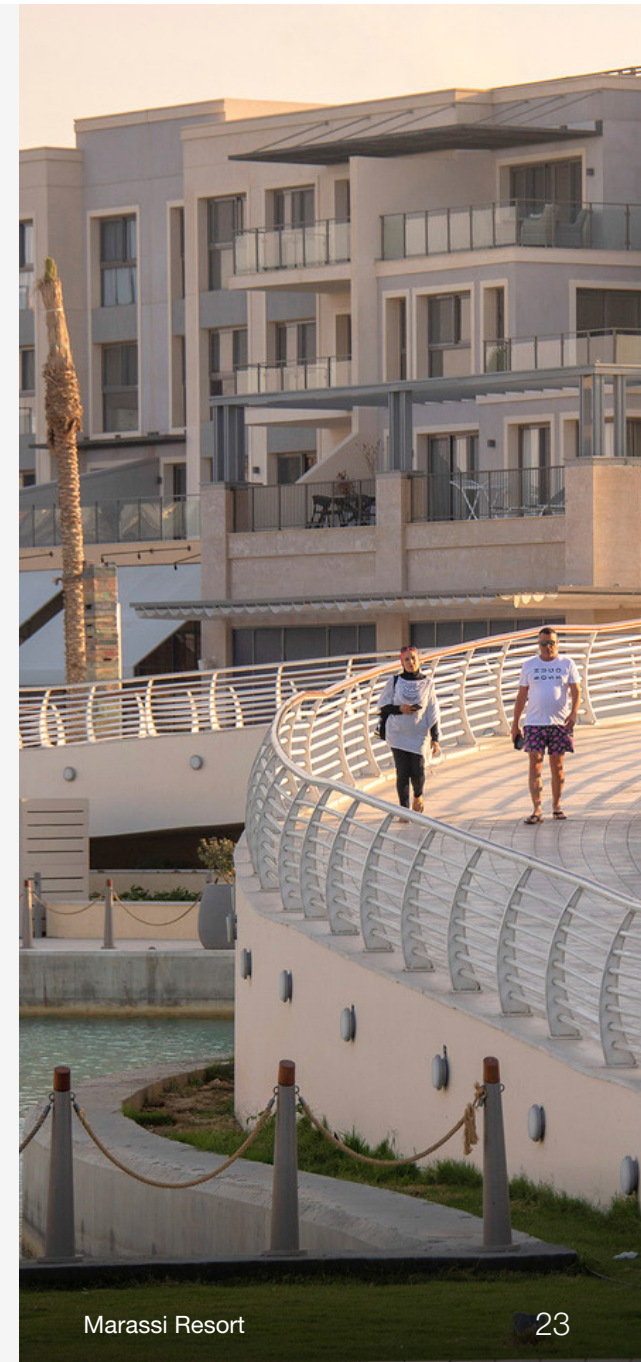

Construction items prices

Division 1 – General requirements


Tower crane

Hire per month of 14 tonne tower crane, 60 to 70m jib and height of around 50m.

- Prices obtained from: Flash Cranes
- Prices include driver/ operator costs
- Prices exclude gas and electricity
- Prices are based on 26 working days (10 working hours)
- The prices are obtained in Euro and converted to EGP. This is an average price while the actual price varies according to the project's location.

Figure 12

Tower crane — Flash Cranes (EGP)

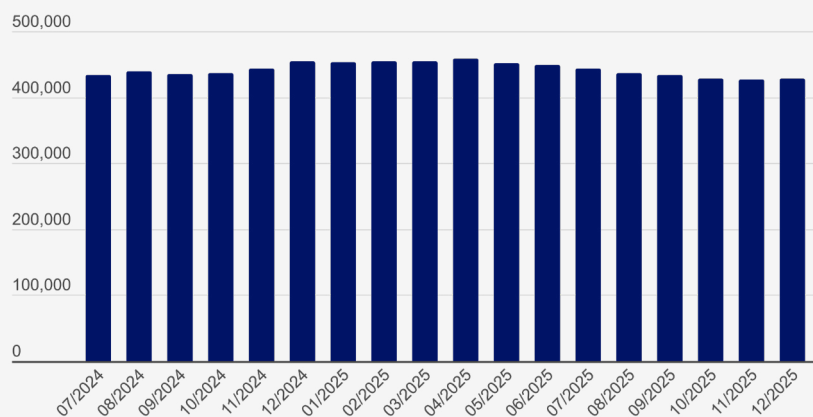

Hire per month for Q3 & Q4 2025 slightly decreased relative to Q2 2025 due to the fluctuation of the Euro exchange rate. However, it is expected that the hire per month of the tower crane will remain stable following the euro movement during the next quarter.


Loader

Hire per month of Caterpillar Loader Model 950.

- Prices obtained from: JCB Teckman
- Prices for JCB WLD model 455ZX with a buy back option up to 50% after minimum 2 years
- Prices exclude taxes
- This is an average price while the actual price varies according to the project's location

Figure 13

Loader — JCB Teckman (EGP)

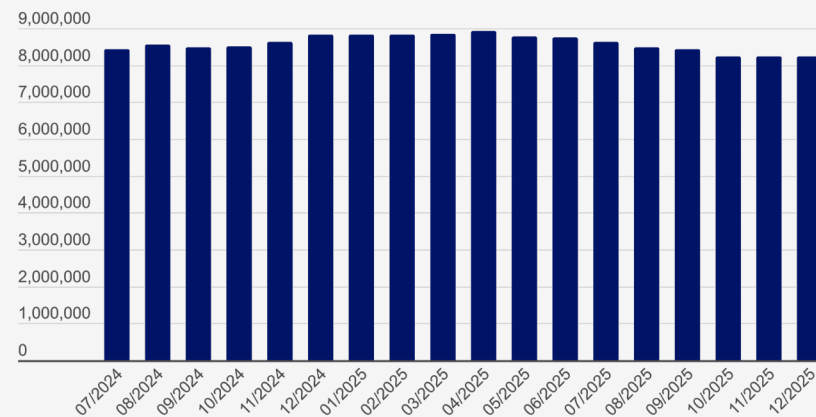

The hire per month slightly decreased during Q3 & Q4 2025 relative to Q2 2025. However, it is expected that the hire per month of the tower crane will remain stable following the movement of the euro during the next quarter.

Construction items prices

Division 1 – General requirements (continued)


Generator

Honda Generator new shape Version GX390, Capacity A/C 5500 and net power 11.2 hp / 3600 rpm.

- Prices obtained from: El Sayad Trading Misr
- Prices include 14% VAT

Figure 14

Generator — El Sayed Trading Misr (EGP)

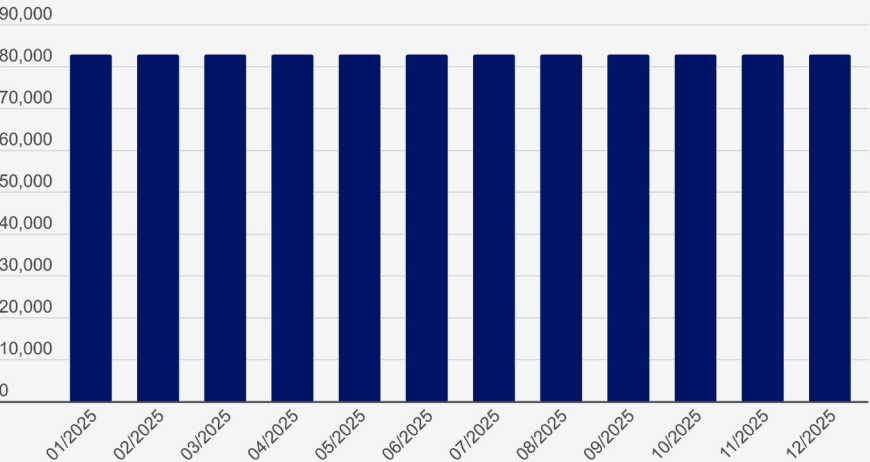

Price remained stable during Q3 & Q4 2025 compared to Q2 2025. Also, it is expected to remain stable during the next quarter.



Construction items prices

Division 2 – Site construction


Irrigation system

Price per square metre of landscape manual irrigation system, using UPVC pipes.

- Prices obtained from: Icon for Landscape
- Prices include 14% sales tax
- Prices include delivery to site
- Delivery time is a week after contracting

Figure 15

Irrigation system — Icon for Landscape (EGP)

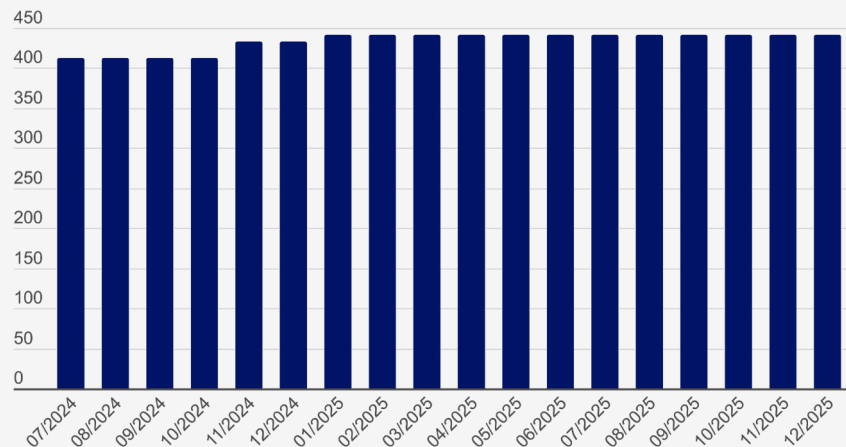

Price remained stable during Q3 & Q4 2025 compared to Q2 2025. Also, it is expected to remain stable during the next quarter.


Lawn (grass)

Price per square metre of ground cover type, paspalum sod.

- Prices obtained from: Icon for Landscape
- Prices include 14% sales tax
- Prices include delivery to site
- Delivery time is a week after contracting

Figure 16

Lawn — Icon for Landscape (EGP)

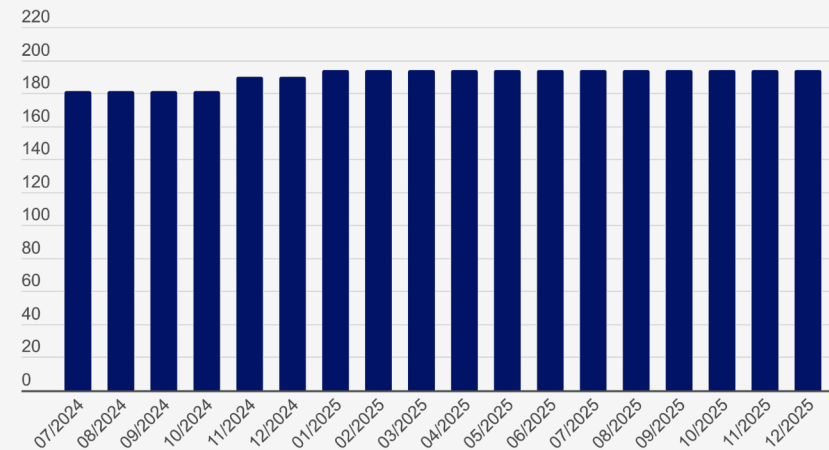

Price remained stable during Q3 & Q4 2025 compared to Q2 2025. Also, it is expected to remain stable during the next quarter.

Construction items prices

Division 2 – Site construction (continued)


Red hexagonal interlock tiles

Supply per square metre of red hexagonal concrete interlock tiles 22x20x6cm.

- Prices obtained from: Ministry of Housing and Development
- Prices include 14% VAT

Figure 17

Red hexagonal interlock tiles – Ministry of Housing and Development (EGP)

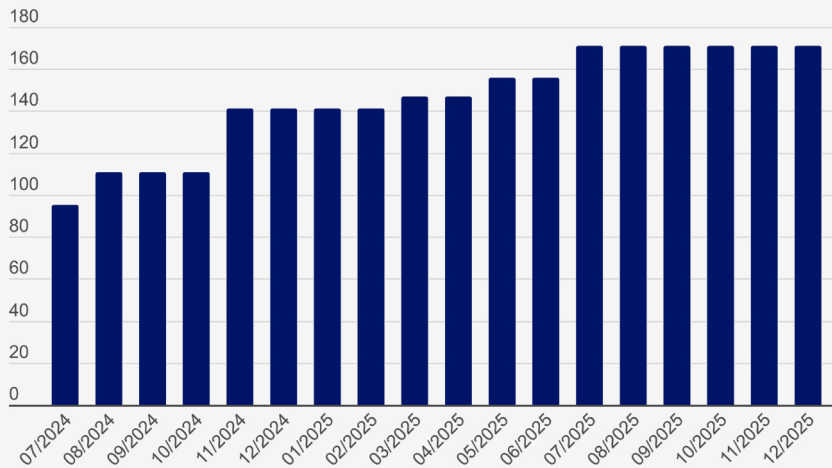

Price increased in Q3 & Q4 2025 compared to Q2 2025. However, it is expected to remain stable during the next quarter.


Yellow hexagonal interlock tiles

Supply per square metre of yellow hexagonal concrete interlock tiles 22x20x8cm.

- Prices obtained from: Ministry of Housing and Development
- Prices include 14% VAT

Figure 18

Yellow hexagonal interlock tiles – Ministry of Housing and Development (EGP)

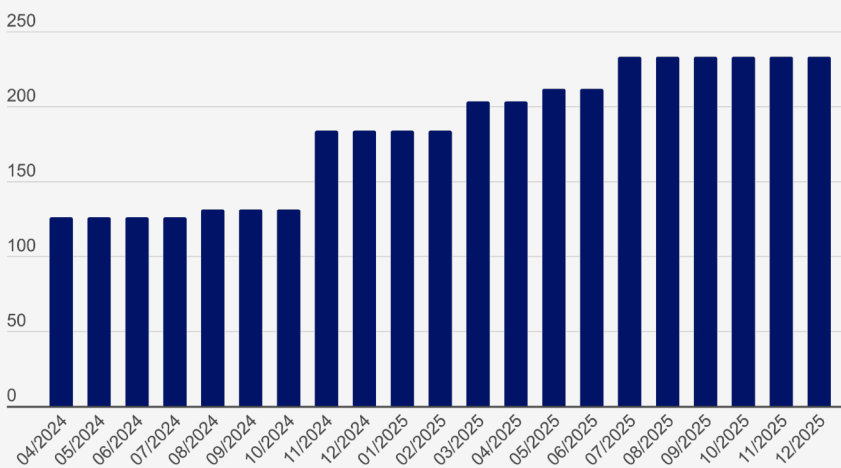

Price increased in Q3 & Q4 2025 compared to Q2 2025. However, it is expected to remain stable during the next quarter.

Construction items prices


Division 3 – Concrete

Steel reinforcement bars

Supply per tonne of steel reinforcement bars, mild steel, all bar sizes, grade 52 steel.

- Prices obtained from: Ministry of Housing and Development

Figure 19

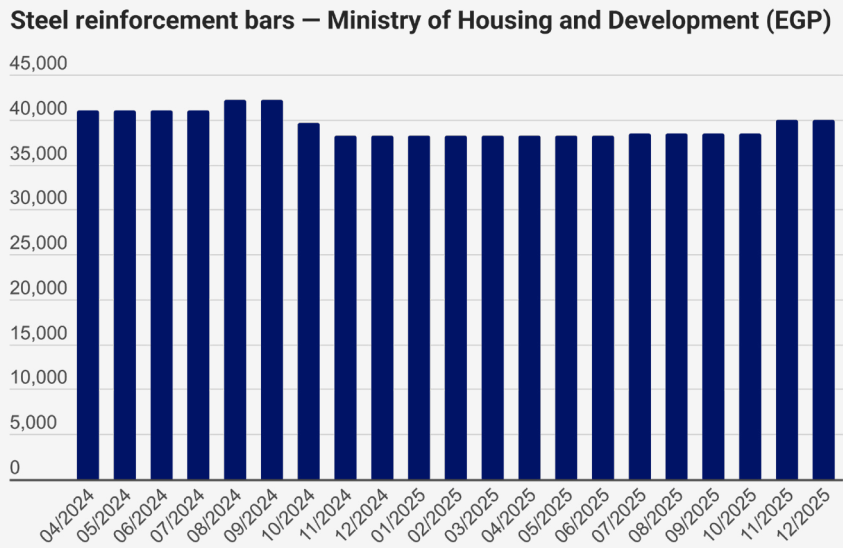


Price increased during Q3 & Q4 2025 compared to Q2 2025. Also, it is expected to remain stable during the next quarter.

Ordinary Portland cement (OPC)

Supply per tonne of grey Ordinary Portland Cement 42.5-62.5MPa strength.

- Prices obtained from: Ministry of Housing and Development

Figure 20

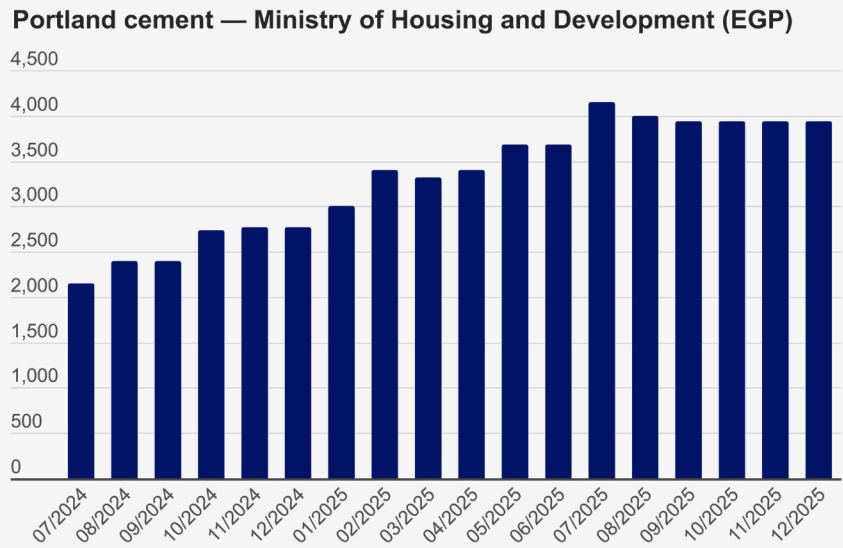

Price increased during Q3 & Q4 2025 compared to Q2 2025. Also, it is expected to remain stable during the next quarter.

Construction items prices

Division 3 – Concrete (continued)


Ready mix concrete

Supply per cubic metre cast in-situ ready mix concrete of strength 250kg/cm2, normal Ordinary Portland Cement (OPC) based.

- Prices obtained from: Ministry of Housing and Development

Figure 21

Ready mix concrete — Ministry of Housing and Development (EGP)

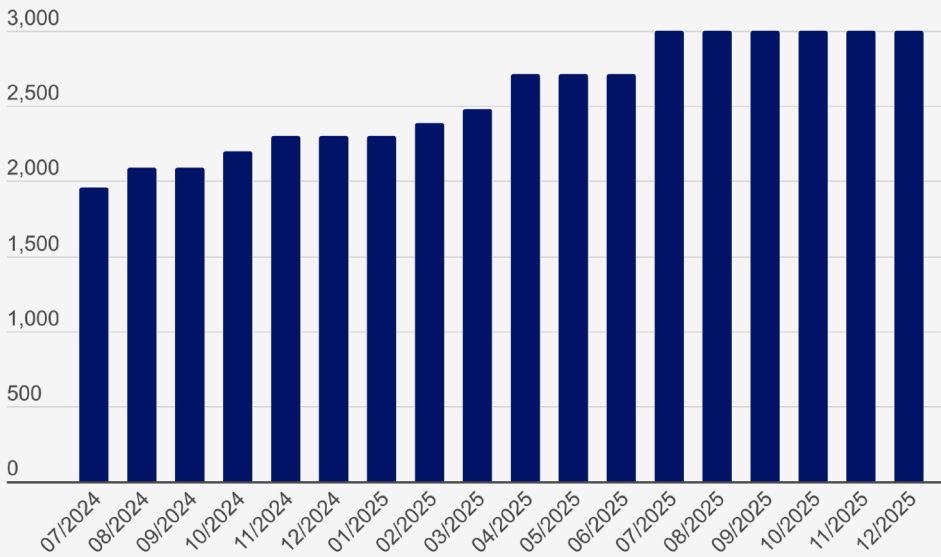

Price increased during Q3 & Q4 2025 compared to Q2 2025. Also, it is expected to remain stable during the next quarter.



Construction items prices


Division 4 – Masonry

Masonry – cement blocks

Supply per 1,000 cement blocks 25x12x6cm, weight 4tn/1,000 blocks.

- Prices obtained from: Ministry of Housing and Development
- Prices include 14% VAT
- Prices include delivery to site in Cairo

Figure 22

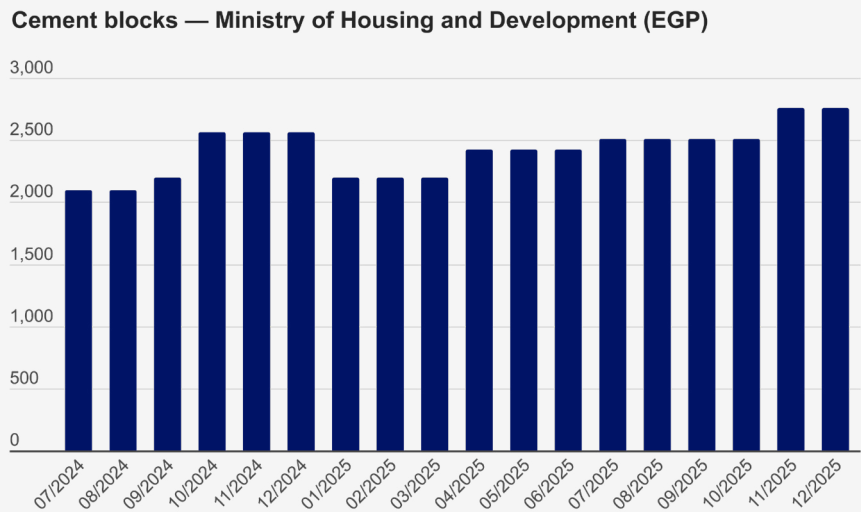


Price increased during Q3 & Q4 2025 compared to Q2 2025. Also, it is expected to remain stable during the next quarter.

Masonry – clay bricks

Supply per 1,000 bricks of clay bricks 25x12x12cm, weight 4.5tn/1,000 blocks.

- Prices obtained from: Ministry of Housing and Development
- Prices may vary according to ordered quantities

Figure 23

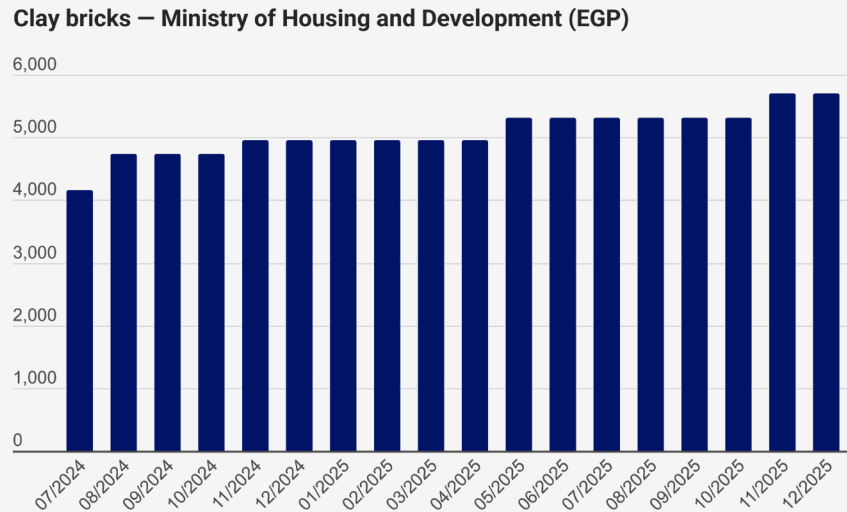

Price increased during Q3 & Q4 2025 compared to Q2 2025. Also, it is expected to remain stable during the next quarter.

Construction items prices

Division 5 – Metals


Stainless steel balustrade

Supply and installation per linear metre of stainless-steel balustrade, grade 304, with 1m height and 1.25mm thickness.

- Prices obtained from: Guardian Architectural Metal Works
- Prices exclude VAT and delivery to site

Figure 24

Stainless steel balustrade — Guardian Architectural Metal Works (EGP)

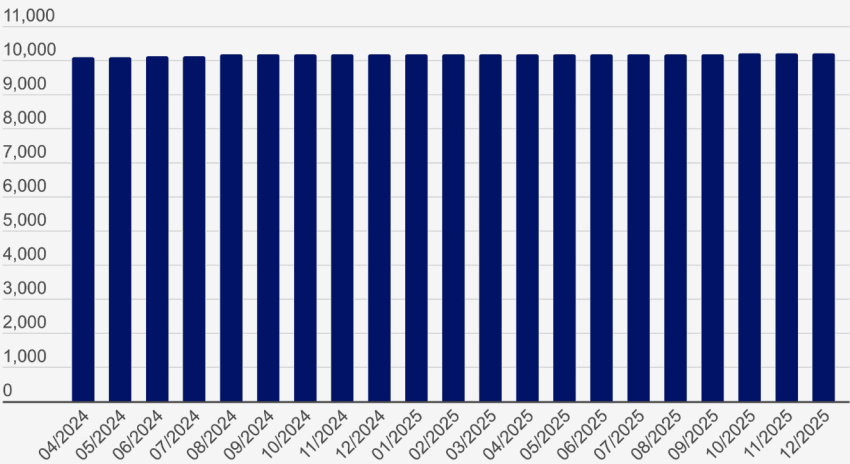

Price increased during Q3 & Q4 2025 compared to Q2 2025. Also, it is expected to remain stable during the next quarter.


Glass handrail

Supply and install per linear metre of 12mm thick tempered glass handrail with stainless steel top rail, stainless steel grade 304.

- Prices obtained from: Guardian Architectural Metal Works
- Prices exclude VAT and delivery to site

Figure 25

Glass handrail — Guardian Architectural Metal Works (EGP)

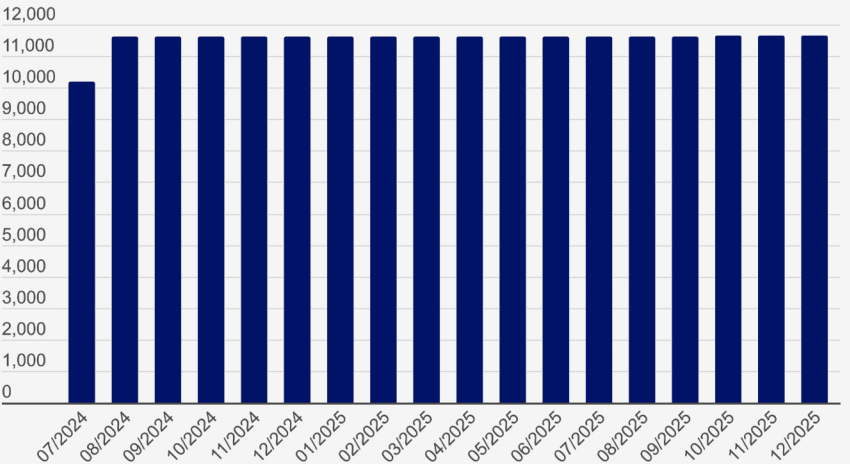

Price increased during Q3 & Q4 2025 compared to Q2 2025. Also, it is expected to remain stable during the next quarter.

Construction items prices

Division 5 – Metals (continued)


Steel ladder

Supply and installation per unit of 4m high steel ladder with safety cage, steel grade 37.

- Prices obtained from: Guardian Architectural Metal Works
- Prices exclude VAT and delivery to site

Figure 26

Steel ladder — Guardian Architectural Metal Works (EGP)

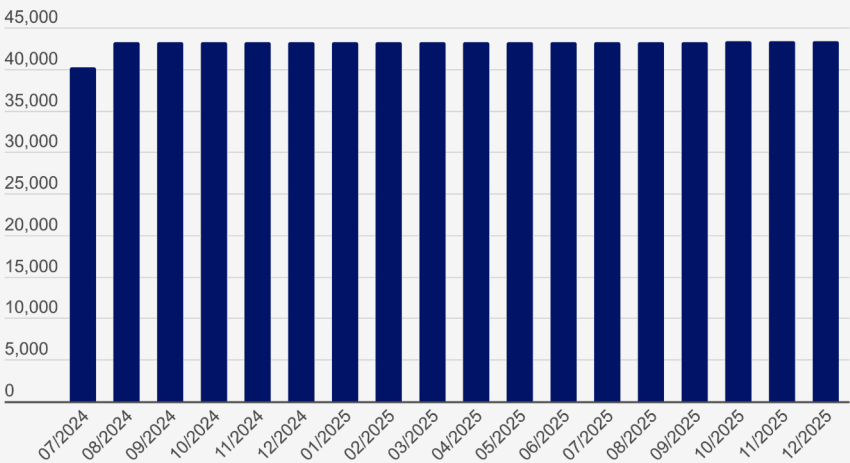

Price increased during Q3 & Q4 2025 compared to Q2 2025. Also, it is expected to remain stable during the next quarter.


Stainless steel handrail

Supply and installation per linear metre of 1.25mm thickness stainless steel wall mounted handrail, grade 304.

- Prices obtained from: Guardian Architectural Metal Works
- Prices exclude VAT and delivery to site

Figure 27

Stainless steel handrail — Guardian Architectural Metal Works (EGP)

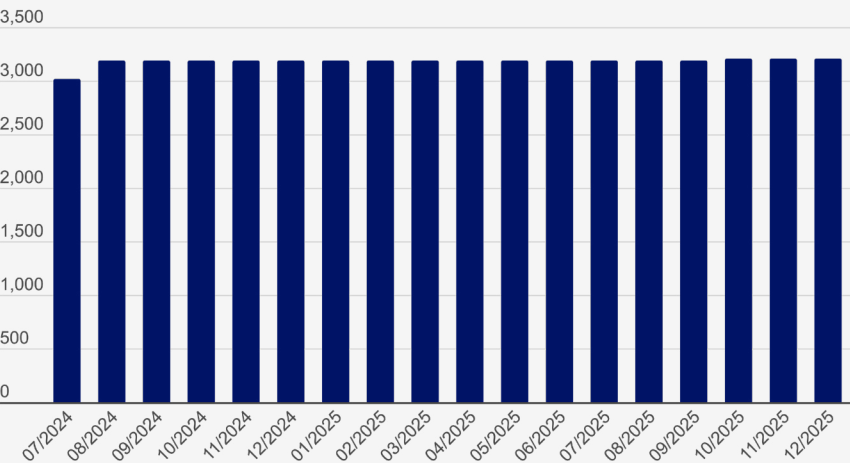

Price increased during Q3 & Q4 2025 compared to Q2 2025. Also, it is expected to remain stable during the next quarter.

Construction items prices

Division 7 – Thermal and moisture insulation


Waterproofing

Supply per square metre of bituminous waterproofing membrane, reinforced with polyester, 3 mm thickness.

- Prices obtained from MHUC
- Prices include 14% VAT
- Prices exclude delivery to site

Figure 28

Waterproofing — Modern Group (EGP)

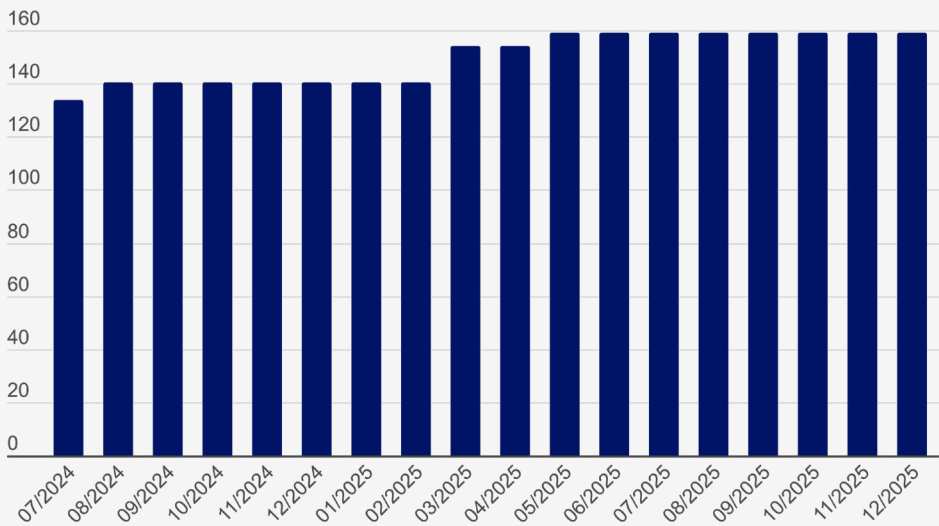

Price remained stable during Q3 & Q4 2025 compared to Q2 2025. However, it is expected to remain stable during the next quarter.



Cairo Festival City, Infrastructure

Construction items prices

Division 8 – Doors & windows


Aluminium sliding windows

Supply and install per unit of aluminium sliding window (1x1m) with 2 sashes, clear double glass 18mm thickness (6/6/6).

- Prices obtained from: Eagle
- Prices include all accessories
- Prices include 14% VAT
- Prices include installation

Figure 29

Aluminum sliding windows — Eagle (EGP)

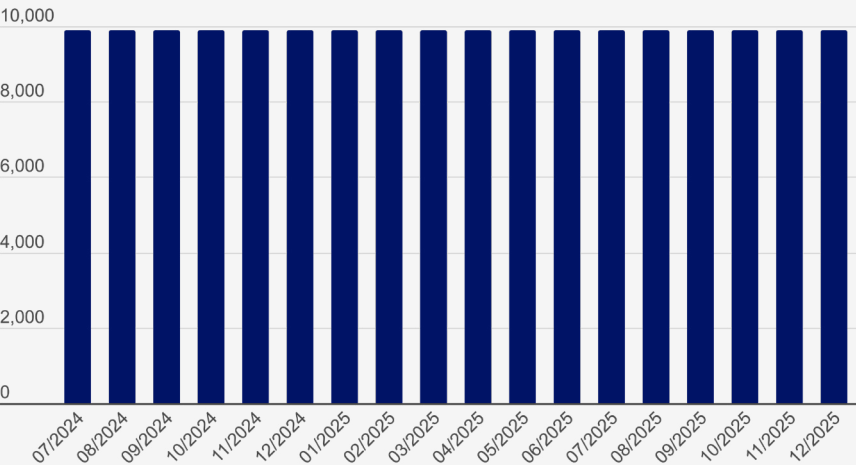

Price remained stable during Q3 & Q4 2025 compared to Q2 2025. Also, it is expected to remain stable during the next quarter.


Aluminium turn windows

Supply and install per unit of aluminium turn window (1x1m) with 1 sash, clear double glass 18mm thickness (6/6/6).

- Prices obtained from: Eagle
- Prices include 14% VAT
- Prices include installation

Figure 30

Aluminum turn windows — Eagle (EGP)

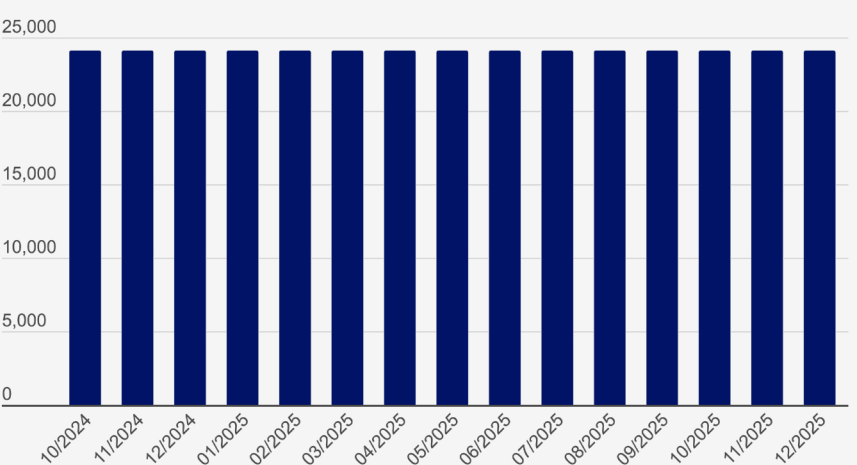

Price remained stable during Q3 & Q4 2025 compared to Q2 2025. Also, it is expected to remain stable during the next quarter.

Construction items prices

Division 8 – Doors & windows (continued)


Curtain walls

Supply and install per unit of aluminium curtain walling (2x2m, 4 panels), clear double glass 18mm thickness (6/6/6).

- Prices obtained from: Eagle
- Prices include all accessories
- Prices include 14% VAT
- Prices include installation

Figure 31

Curtain walls — Eagle (EGP)

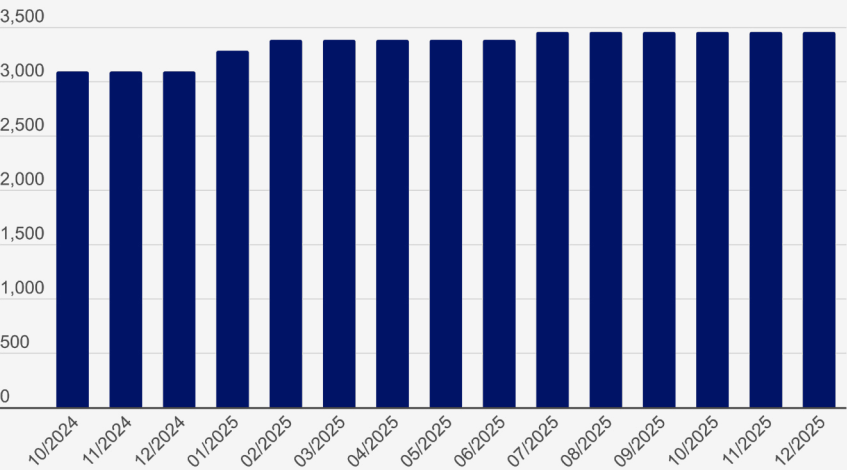

Price remained stable during Q3 & Q4 2025 compared to Q2 2025. Also, it is expected to remain stable during the next quarter.


UPVC sliding windows

Supply and install per square metre of uPVC sliding windows, with single clear glass, glass is obtained from Saint Gobain.

- Prices obtained from: Eco House
- Prices include all accessories
- Prices include delivery to site

Figure 32

UPVC sliding windows — Eco House (EGP)

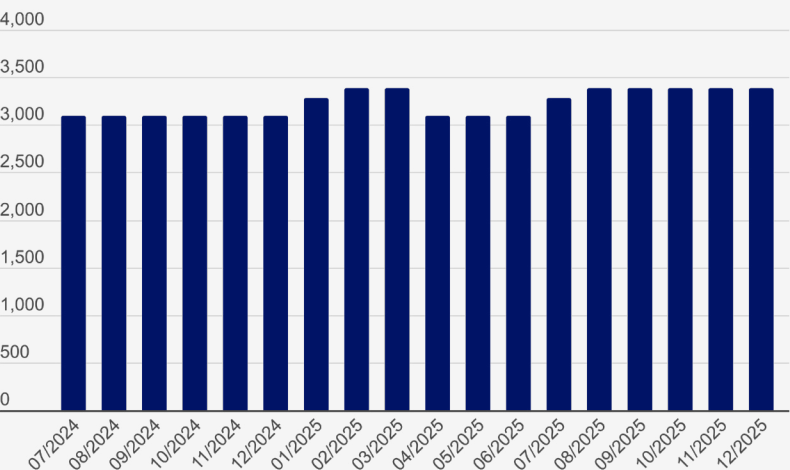

Construction items prices

Division 8 – Doors & windows (continued)


UPVC turn/tilt windows

Supply and install per square metre of uPVC turn and tilt window, clear double glass, glass is obtained from Saint Gobain.

- Prices obtained from: Eco House
- Prices include all accessories
- Prices exclude delivery to site

Figure 33

UPVC turn/tilt windows — Saint Gobain (EGP)

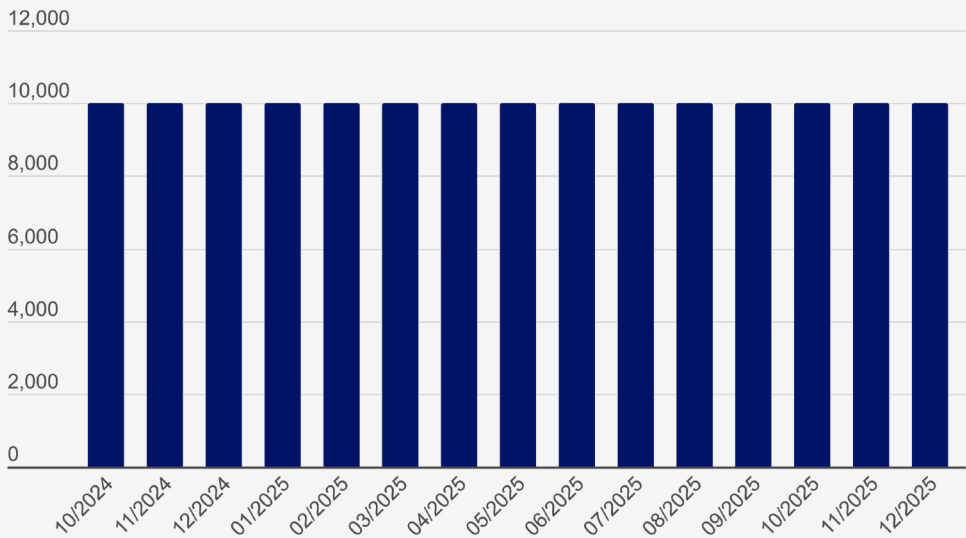

Construction items prices

Division 9 – Finishes


Galala marble

Supply per square metre of Galala local marble, 30x30cm.

- Prices obtained from: Ministry of Housing and Development
- Prices exclude VAT
- Prices exclude delivery to site, installation costs, wastage, skirting, substrate/sub-flooring, (grout, etc.)

Figure 34

Galala marble — Ministry of Housing and Development (EGP)

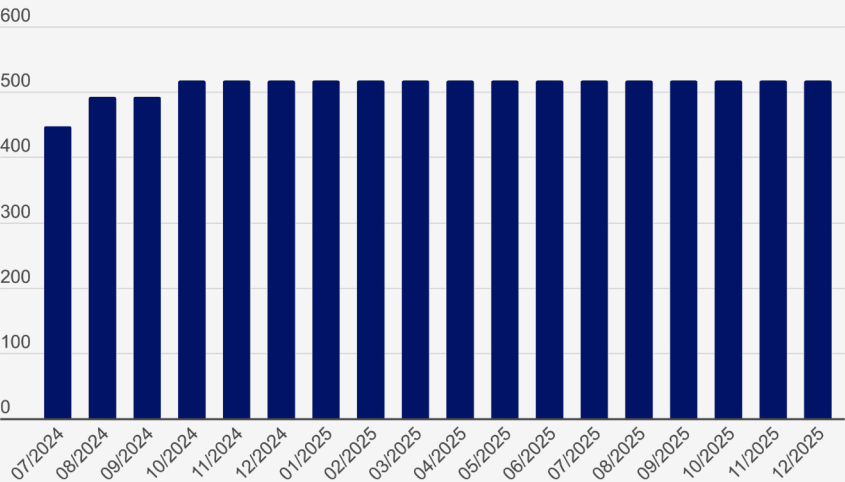

Price remained stable within Q3 & Q4 2025 compared to Q2 2025. Also, it is expected to remain stable during the next quarter.


Grey teriesta marble

Supply per square metre of honed Grey Teriesta Marble, 30 mm.

- Prices obtained from: Ministry of Housing and Development
- Prices exclude taxes, delivery to site, installation costs, wastage, and skirting

Figure 35

Grey teriesta marble — Ministry of Housing and Development (EGP)

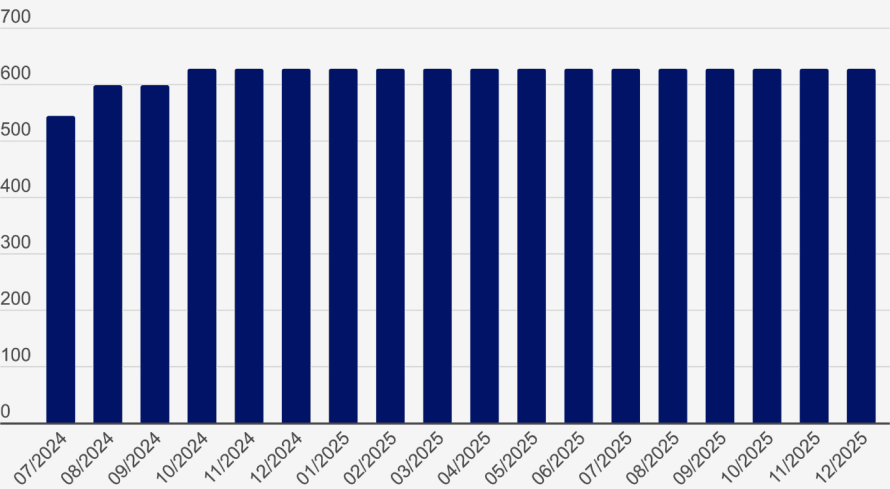

Price remained stable within Q3 & Q4 2025 compared to Q22025. Also, it is expected to remain stable during the next quarter.

Construction items prices

Division 9 – Finishes (continued)


Floor ceramic tiles

Supply per square metre of floor ceramic tiles, indoor ceramic, Prima Princess 1087A Model, 50x50 cm.

- Prices obtained from: Ministry of Housing and Development

Figure 36

Ceramic floor tiles – Ministry of Housing and Development (EGP)

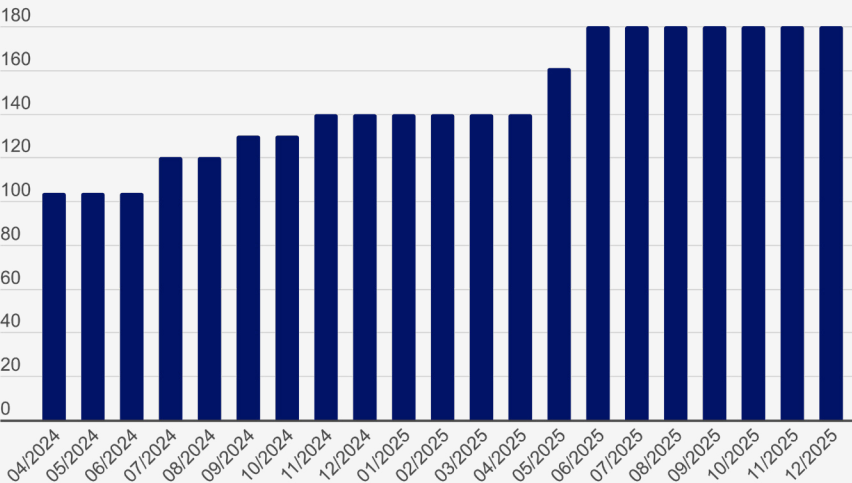

Price remained stable within Q3 & Q4 2025 compared to Q2 2025. Also, it is expected to remain stable during the next quarter.


Turkish HDF tiles – 8mm – class 31

Supply and install per square metre of HDF flooring tiles, Turkish made, 8mm thickness and class 31.

- Prices obtained from: Tagoury Creations (Youssef El Tagoury)
- Prices exclude VAT

Figure 37

Turkish HDF tiles — Tagoury Creations (EGP)

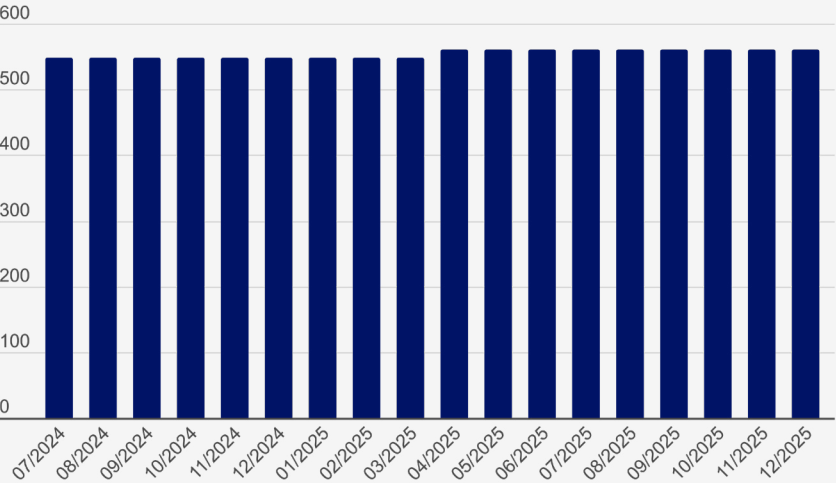

Price remained stable within Q3 & Q4 2025 compared to Q2 2025. Also, it is expected to remain stable during the next quarter.

Construction items prices


Division 9 – Finishes (continued)

Suspended ceiling gypsum board

Supply per square metre of gypsum board suspended ceiling complete system. Moisture resistant, complete system supplied including all accessories.

- Prices obtained from: Knauf
- Prices include 14% VAT and custom duty
- Prices exclude delivery to site, installation, wastage, and finishing

Figure 38

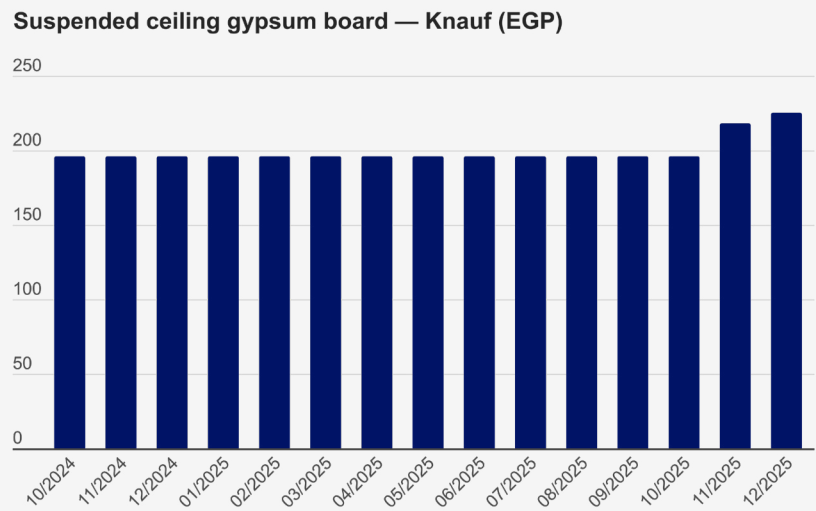


Price increased during Q3 & Q4 2025 compared to Q2 2025. Also, it is expected to remain stable during the next quarter.

Suspended ceiling tiles

Supply per square metre of 600x600mm ceiling tiles laminate PVC and aluminium foil 9 mm thickness, moisture resistant, complete system supplied including all accessories.

- Prices obtained from: Knauf
- Prices include 14% VAT and custom duty
- Prices are ex-works and exclude delivery to site, installation, wastage and finishing

Figure 39

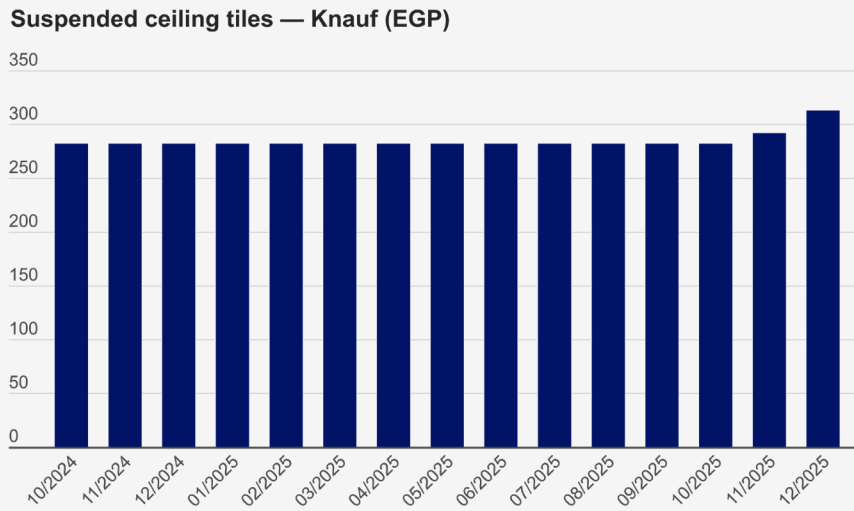

Price increased during Q3 & Q4 2025 compared to Q2 2025. Also, it is expected to remain stable during the next quarter.

Construction items prices

Division 9 – Finishes (continued)


Gypsum board – wall partitions

Supply per square metre of regular unfinished gypsum board wall partition complete system with all accessories one layer from both sides, each layer 12.5mm thickness; CW75/UW75mm; wall thickness 100 mm. Knauf W111 wall gypsum board partition systems.

- Prices obtained from: Knauf
- Prices include 14% VAT
- Prices exclude delivery to site, installation, wastage, and finishing

Figure 40

Gypsum board – wall partitions — Knauf (EGP)

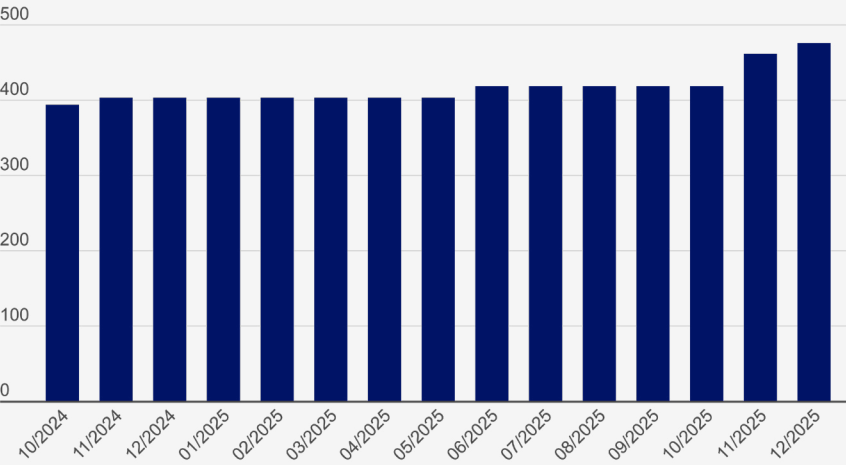

Price increased during Q3 & Q4 2025 compared to Q2 2025. Also, it is expected to remain stable during the next quarter.


Internal wall paint

Supply per square metre of Fenomastic Wonderwall Lux wall paint includes two coats of primer, two stucco coats and two coats of Fenomastic emulsion matte paint.

- Prices obtained from: Jotun
- Prices include VAT
- Prices exclude application, surface treatment or wastage

Figure 41

Internal wall paint — Jotun (EGP)

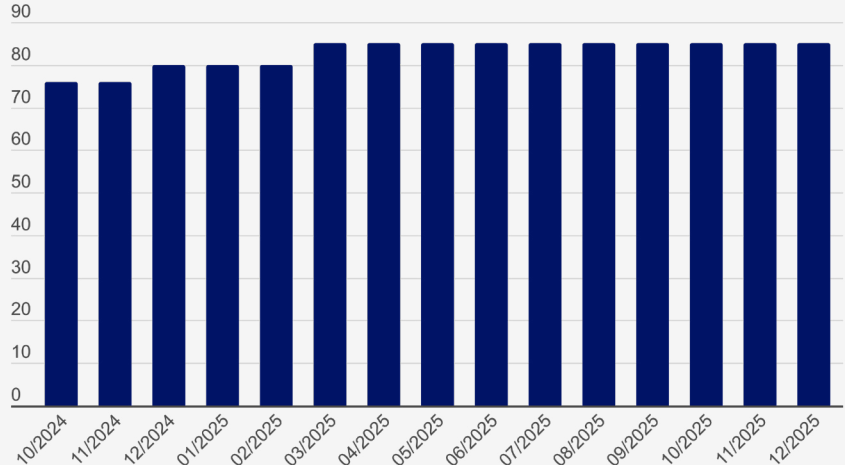

Price remained stable within Q3 & Q4 2025 compared to Q2 2025. Also, it is expected to remain stable during the next quarter.

Construction items prices

Division 9 – Finishes (continued)


External wall paint

Supply per square metre of white Jota shield colour last matt external wall paint includes two coats of alkali resistant primer, two block filler coats and two coats of white top-coat matte paint.

- Prices obtained from: Jotun
- Prices include VAT
- Prices exclude application, surface treatment or wastage

Figure 42

External wall paint — Jotun (EGP)

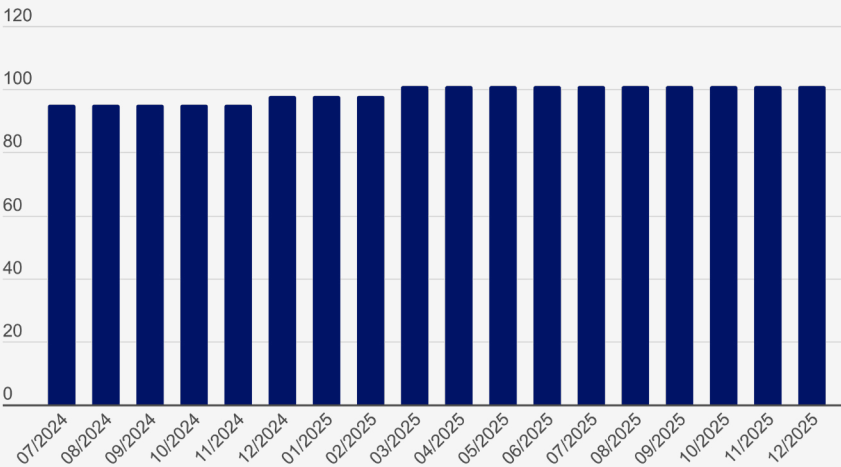

Price remained stable within Q3 & Q4 2025 compared to Q2 2025. Also, it is expected to remain stable during the next quarter.



Construction items prices

Division 13 – Special construction


Solar water heater

Supply and installation (per unit) of 200 litre solar water heater with 2.3 square metre flat plate collector; prices include all fittings, mounting kits, fixing kits, solar fluid, connection kit and safety valves.

- Prices obtained from: Acropol
- Prices include sales tax, custom duties, import duties and installation by subcontractor
- Prices exclude hot water pumps and any preparatory civil work or pipework
- Delivery time: 6 to 8 weeks

Figure 43

Solar water heater — Acropol (EGP)

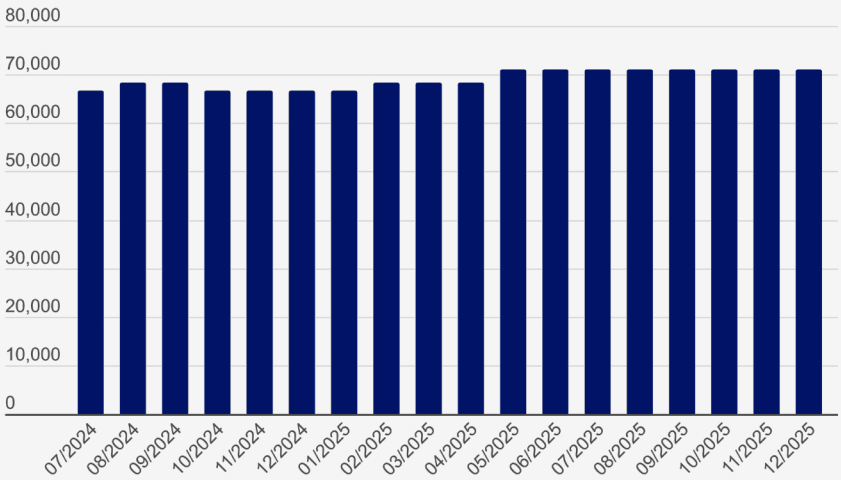

Price remained stable within Q3 & Q4 2025 compared to Q2 2025. Also, it is expected to remain stable during the next quarter.



Construction items prices

Division 14 – Conveying systems


Elevator

Supply and installation of OJIS Spanish imported elevator, machine-room-less, 630kg load, 5 stops, finished internal car, all buttons and signs installed in all floors,1 m/s speed (VVVF).

- Prices obtained from: OJIS
- Prices include custom duties, import duties, delivery and full installation by manufacturer, full testing, and commissioning by manufacturer
- Delivery time: 14 weeks

Figure 44

Elevator — OJIS (EGP)

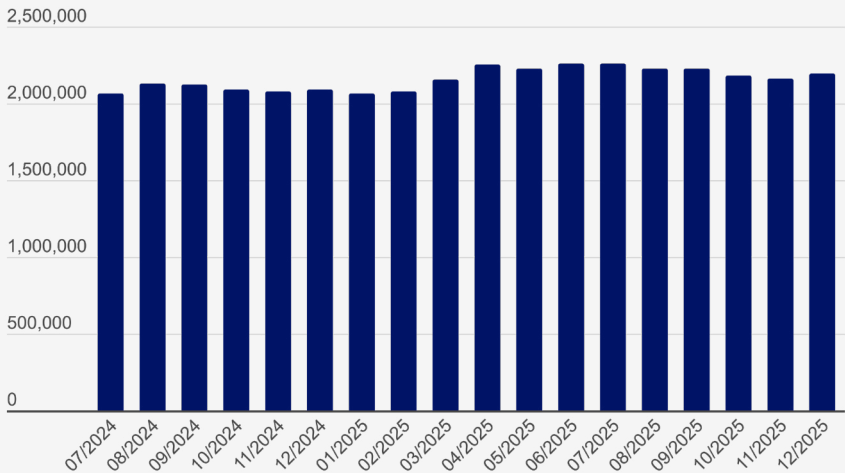

Price remained stable within Q3 & Q4 2025 compared to Q2 2025. Also, it is expected to remain stable during the next quarter.


Escalator

Supply and installation of ASIA FUJI Chinese- imported escalator, 3.5m rise, 0.5m/s speed (VVVF), 35° inclination, 1,000mm step width, including truss support system and landing.

- Prices obtained from: OJIS
- Prices include custom duties, import duties, delivery and full installation, full testing, and commissioning by manufacturer
- Delivery time: 12 weeks

Figure 45

Escalator — OJIS (EGP)

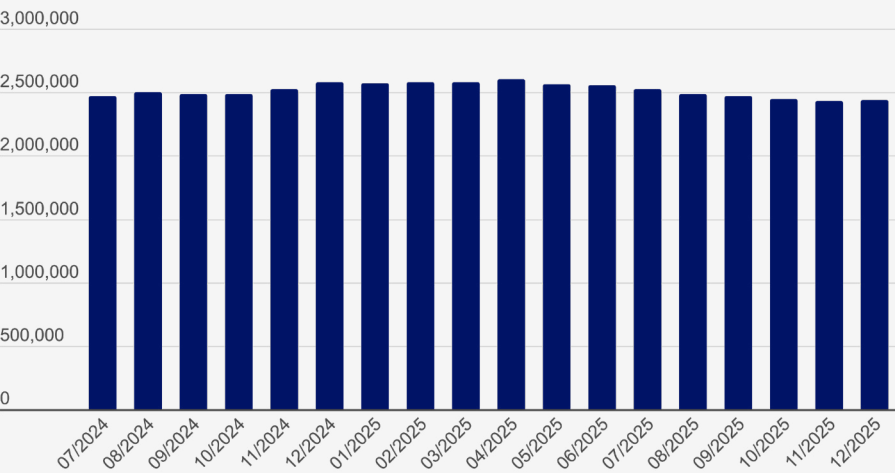

Price remained stable within Q3 & Q4 2025 compared to Q2 2025. Also, it is expected to remain stable during the next quarter.

Construction items prices

Division 14 – Conveying systems (continued)


Travelator (moving walkway)

Supply and installation of moving walkway imported from Italy, 3.5m rise, 0.5m/s speed (VVVF), 12-degree inclination and 1,000 mm step width.

- Prices obtained from: OJIS
- Prices include custom duties, import duties, delivery and full installation, full testing, and commissioning by manufacturer
- Delivery time: 16 weeks

Figure 46

Travelator — OJIS (EGP)

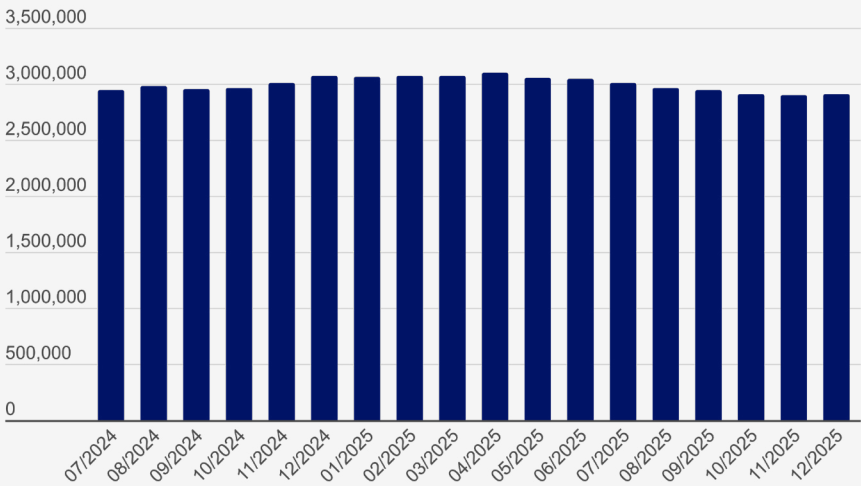

Price remained stable within Q3 & Q4 2025 compared to Q2 2025. Also, it is expected to remain stable during the next quarter.



Construction items prices

Division 15 – Mechanical


PPR green pipes 25mm PN20

Supply per metre of water supply PPR green pipe, external diameter 25mm, 20 bar and thickness 4.2mm.

- Prices obtained from: Egyptian German Co. (EGIC)
- Prices exclude delivery to site, installation, connections, fittings and joints and accessories

Figure 47

PPR green pipes 25mm — EGIC (EGP)

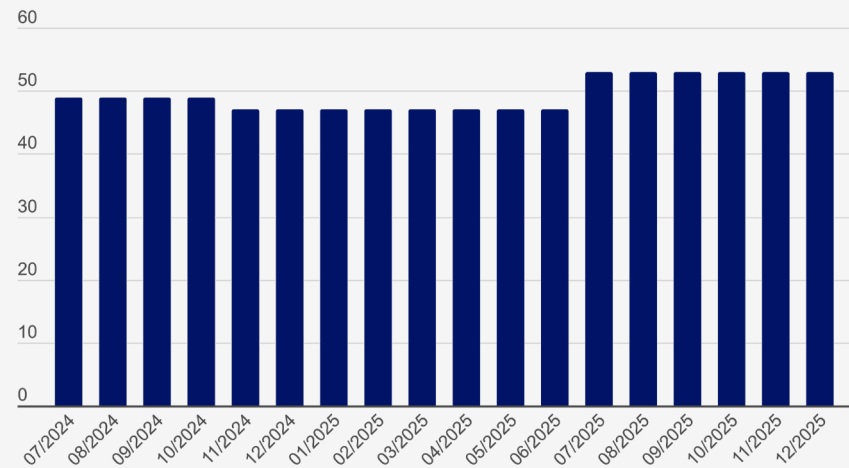

Price increased within Q3 & Q4 2025 compared to Q2 2025. Also, it is expected to remain stable during the next quarter.


PPR green pipes 50mm PN20

Supply per metre of water supply PPR green pipe, external diameter 50mm, 20 bar pressure and thickness 4.2mm.

- Prices obtained from: Egyptian German Co. (EGIC)
- Prices exclude delivery to site, installation, connections, fittings and joints and accessories

Figure 48

PPR green pipes 50mm — EGIC (EGP)

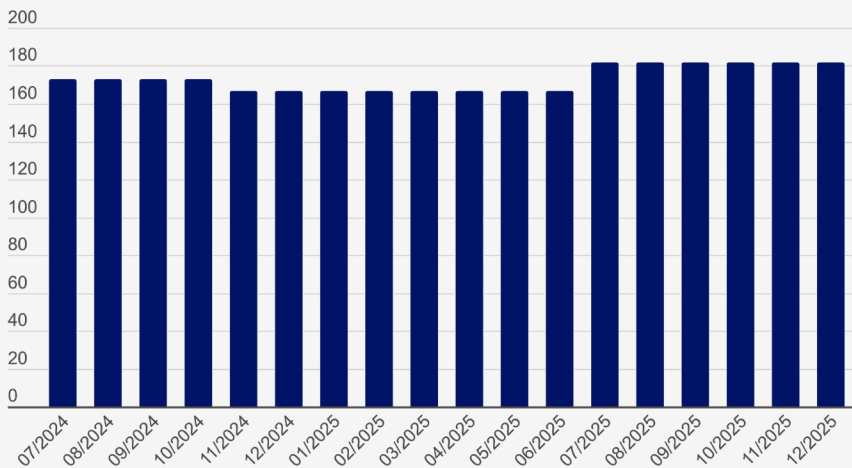

Price increased within Q3 & Q4 2025 compared to Q2 2025. Also, it is expected to remain stable during the next quarter.

Construction items prices

Division 15 – Mechanical (continued)


PPR green pipes 110mm PN20

Supply per metre of water supply PPR green pipe, external diameter 110mm, 20 bar pressure and thickness 4.2mm.

- Prices obtained from: Egyptian German Co. (EGIC)
- Prices exclude delivery to site, installation, connections, fittings and joints and accessories

Figure 49

PPR green pipes 110mm — EGIC (EGP)

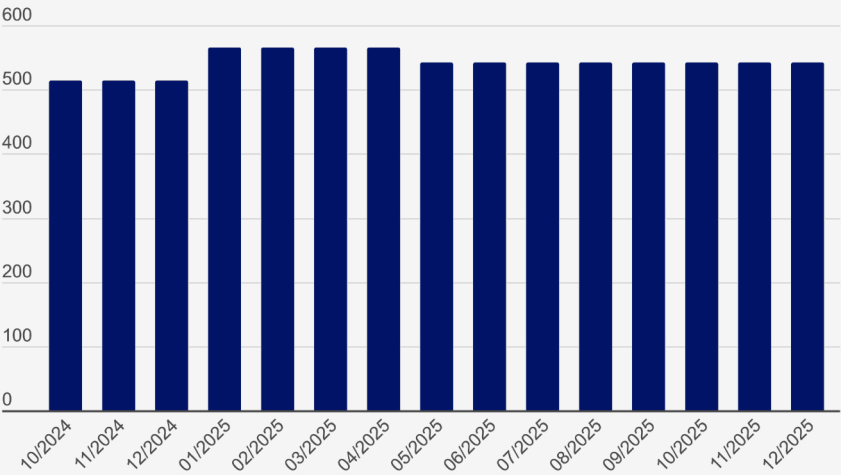

Price increased within Q3 & Q4 2025 compared to Q2 2025. Also, it is expected to remain stable during the next quarter.



Marassi Resort

Construction items prices

Division 16 – Electrical


Copper electrical cables

Supply per metre of 3cx120mm2 CU/XLPE/STA/PVC medium voltage cables.

- Prices obtained from: El Giza Sewedy cables
- Prices include 14% VAT
- Prices exclude delivery to site, installation, cable glands/terminations, conduits, labels, and preparatory work

Figure 50

Copper electrical cables — El Giza Sewedy Cables (EGP)

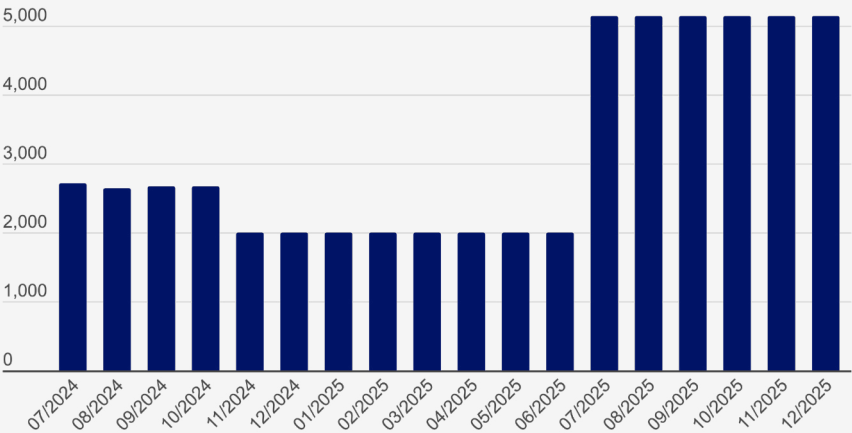

Price increased within Q3 & Q4 2025 compared to Q2 2025. Also, it is expected to remain stable during the next quarter.


Aluminium electrical cables

Supply per metre of 3cx120mm2 AL/XLPE/STA/PVC medium voltage cables.

- Prices obtained from: El Giza Sewedy cables
- Prices include 14% VAT
- Prices exclude delivery to site, installation, cable glands/terminations, conduits, labels, and preparatory work

Figure 51

Aluminum electrical cables — El Giza Sewedy Cables (EGP)

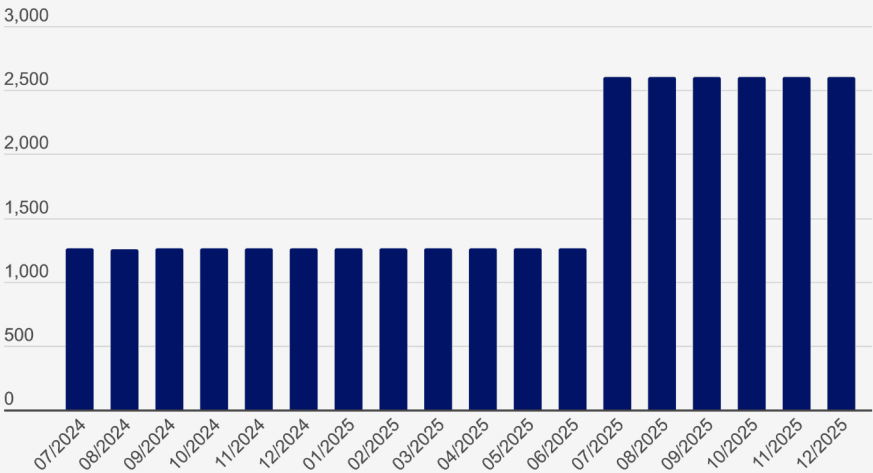

Price increased within Q3 & Q4 2025 compared to Q2 2025. Also, it is expected to remain stable during the next quarter.

Supplier credits

Flash Cranes

Contact Person: Eng. Farag Atallah
M: 01003424009

JCB Teckman

Contact person: Eng. Sameh Sawires
M: 011133409429
Email: sameh@teckmance.com

Acrow Misr

Contact Person: Ahmed Taha
T: 01062707555

Icon Landscaping and sports solutions

Contact Person: Eng. Micheal Ramzy
M: 01000444750
Email: info@iconegy.com

UNI floor

Contact Person: Eng. Nasser El Mahdi
M: 01111492932
E-mail: nasser@unifloor-eg.com
Website: www.unifloor-eg.com

Knauf

Contact Person: Eng. Ali Darwish
M: 01097775302
E-mail: darwish.ali@knauf.eg
Website: www.knauf.eg

Jotun

Contact Person: Mohanad Ghanima
M: 01273533348
Email: Mohanad.Ghanima@jotun.com.eg

Lafarge

Contact Person: Eng. Abdelrahman
M: 01203971304

Guardian Architectural Metal Works

Contact Person: Eng. Mohamed Shaaban
M: 0100 541 0209
T: 02 2359 7057
E-mail: info@guardiandss.com
URL: www.guardianss.com

El Sayad Trading Misr

Contact Person: Eng. Ahmed Mostafa
M: 01286545668
T: 02 22905710
Website: www.elsayad.com.eg

Eagle

Contact Person: Mohamed Hatem
M: 01007472425
E-mail: Mhatem.eagle@gmail.com

Eco House

Contact Person: Eng. Nabil
M: 01212288806

Egyptian German Industrial Company (EGIC)

Contact Person: Eng. Mohamed Maly
M: 010 18686444
T: 02 23611168
E-mail: mohamed.maly@egic.com.eg
Website: <http://www.egic.com.eg>

Modern Group

Contact Person: Eng. Ahmed Ali
M: 012 72572255
E-mail: sales@modernwaterproofing.com
Website: www.modernwaterproofing.com

Ojis Elevators

Contact Person: Eng. Mohamed Khedr
M: 012 00208884
E-mail: info@ojiseg.com

Tagoury creations (Youssef El Tagoury)

Contact Person: Eng. Mohamed El Tagoury
M: 010 1223400
T: 02 27030092
E-mail: tagoury@tagoury-eg.com
Website: www.tagoury-eg.com

El Giza Sewedy Cables

Contact Person: Eng. Pola Ashraf
Mobile: (+2)010 68048405
E-mail: pashraf@gc-3.com
Website: www.gc-3.com

BICOM

Contact Person: Eng. Victor El Tawil
T: 02 24030364
E-mail: vt@bi.com.eg
Website: www.bi.com.eg

EMAS

Contact Person: Eng. Mohamed Mashaal
M: +201092349996
Email: m.mashal@elseweddy.com

GCCE services

- Procurement management
- Cost planning
- Risk & value management
- Project management
- Cost management
- Due diligence
- Funders' representative
- Insurance valuations
- Contract advice
- Development management
- Feasibility studies & project benchmarking
- Life cycle management
- Project controls & performance monitoring
- PPP/PFI



Contact us



Sherif Sweillam
Director

E: sherif.sweillam@gleeds.com



Muir Smith
Director

E: muir.smith@gleeds.com

Gleeds Construction Consultancy
Egypt, S.A.E.

Building 3, Street 208, Degla Square,
Maadi, Cairo, Egypt

T: +2 022 702 2900

E: Data-eg@gleeds.com



Marassi Resort

Legal disclaimer: This paper was prepared by Gleeds for general information only and neither Gleeds nor any of their partners, employees or other persons acting on their behalf makes any warranty, express or implied nor assumes any liability with respect to the use of the information or methods contained in this report to any person or party. This document is subject to copyright and may not be reproduced without permission from Gleeds Construction Consultancy Egypt, email: data@gleeds.com.eg The Data and research Team uses a variety of open sources and suppliers to obtain the information detailed; however, no responsibility is accepted for its accuracy. Persons desiring to use any information included in this publication should verify its applicability to their circumstances.

This report was prepared in February 2026 and published on 11 February 2026.

[gleeds.com](https://www.gleeds.com)

